

Thunderbolt 3 Dual-4K Docking Station for Laptops - Windows Only

TB3DK2DPW

TB3DK2DPWUE



*actual product may vary from photos

FR: Guide de l'utilisateur - fr.startech.com

DE: Bedienungsanleitung - de.startech.com

ES: Guía del usuario - es.startech.com

NL: Gebruiksaanwijzing - nl.startech.com

PT: Guia do usuário - pt.startech.com

IT: Guida per l'uso - it.startech.com

For the latest information, technical specifications, and support for this product, please visit www.startech.com

FCC Compliance Statement

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Changes or modifications not expressly approved by StarTech.com could void the user's authority to operate the equipment.

Industry Canada Statement

This Class B digital apparatus complies with Canadian ICES-003.

Cet appareil numérique de la classe [B] est conforme à la norme NMB-003 du Canada.

CAN ICES-3 (B)/NMB-3(B)

Use of Trademarks, Registered Trademarks, and other Protected Names and Symbols

This manual may make reference to trademarks, registered trademarks, and other protected names and/or symbols of third-party companies not related in any way to StarTech.com. Where they occur these references are for illustrative purposes only and do not represent an endorsement of a product or service by StarTech.com, or an endorsement of the product(s) to which this manual applies by the third-party company in question. Regardless of any direct acknowledgement elsewhere in the body of this document, StarTech.com hereby acknowledges that all trademarks, registered trademarks, service marks, and other protected names and/or symbols contained in this manual and related documents are the property of their respective holders.

Table of Contents

Introduction	1
Packaging contents.....	1
System requirements.....	1
Product diagram	3
Front view	3
Rear view.....	3
About Thunderbolt 3	4
About DP alt mode (DisplayPort alternative mode).....	4
About USB power delivery 2.0.....	4
Thunderbolt temperature.....	5
About USB 3.0 and USB 3.1 Gen 1	5
About the docking station USB-C ports	5
About the docking station ports	5
Install the docking station	6
Power the docking station.....	6
Connect the docking station	6
Install the drivers.....	6
Charge a device	7
Configure a display device	7
Connect a display to the DisplayPort port.....	7
Connect a display to the Thunderbolt 3 USB-C port.....	8
Connect multiple Thunderbolt 3 displays in a daisy chain	8
Supported video resolutions	9

Bandwidth allocation	9
Troubleshooting.....	11
Technical support.....	12
Warranty information.....	12

Introduction

The TB3DK2DPW and TB3DK2DPWUE integrate Thunderbolt™ 3 technology to offer throughput at speeds up to 40Gbps. It lets you connect dual-4K monitors (60Hz) to your Windows® based laptop. Plus, the dock offers a range of input and output ports, such as DisplayPort, Gigabit Ethernet, USB fast-charge, USB 3.0, USB-C™, headphone, microphone, and Thunderbolt 3.

Packaging contents

- 1 x Thunderbolt 3 dual-4K docking station for laptops
- 1 x Thunderbolt 3 cable - 40Gbps - 0.5 m
- 1 x universal power adapter
- 1 x power cord (NA) - 2 x power cords (UK/EU) for TB3DK2DPWUE
- 1 x instruction manual

System requirements

- Host laptop with an available Thunderbolt 3 port
- Available AC electrical outlet
- DisplayPort equipped display(s) with cable(s) as needed (for additional external display)
- Thunderbolt 3 equipped display(s) with cable(s) as needed (for additional external display)

Note: To connect a second display, you must use one of the docking station's Thunderbolt 3 USB-C ports. Additional adapter purchases might be required to use the docking station with HDMI, DVI, or VGA displays. See the **Configure a display device** section for further details.

- A 4K-capable display is required to achieve 4096 x 2160p resolution (4K is also known as 4K x 2K)
- A 5K-capable display is required to achieve 5120 x 2880p resolution
- Any of the following operating systems:
 - Windows 10 (32-bit or 64-bit)
 - Windows 8 / 8.1 (32-bit or 64-bit)
 - Windows 7 (32-bit or 64-bit)

Notes:

- The docking station only supports Windows operating systems.

- Video output capabilities are dependent on the video card and hardware specifications of your connected host laptop.


Operating system requirements are subject to change. For the latest requirements, please visit www.startech.com/TB3DK2DPW or www.startech.com/TB3DK2DPWUE.

Product diagram

Front view



Rear view

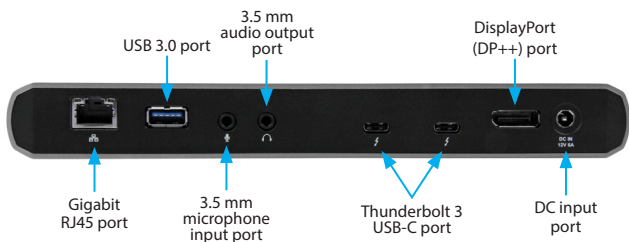

About Thunderbolt 3

Thunderbolt 3 technology uses the USB-C connector, with bandwidth up to 40Gbps. It supports USB 3.1, DisplayPort 1.2, PCI Express 3.0, and increased power delivery to connected devices.

Thunderbolt technology supports both video and data throughput. However, it prioritizes video bandwidth to help ensure seamless display performance. The performance of the remaining dock functions depends entirely on your display configuration.

Thunderbolt 3 products must be used with Thunderbolt 3 cables.

Your computer's Thunderbolt 3 ports might not function properly until you update one or more of the following on your computer:

- BIOS
- Thunderbolt firmware
- Thunderbolt 3 controller drivers
- Thunderbolt 3 software

The required updates will vary depending on your computer.

For an up-to-date list of affected computers and instructions, visit <http://thunderbolttechnology.net/updates>. If your manufacturer isn't listed on the Thunderbolt website, contact your manufacturer.

About DP alt mode (DisplayPort alternative mode)

DP alt mode is a specification that allows a DisplayPort video signal to transfer over USB-C. It enables the use of the USB-C interface for DisplayPort signals. Thunderbolt 3 supports the full USB-C standard, including support for DP alt mode. Because the docking station supports DP alt mode, you can connect Thunderbolt 3 or USB-C based video devices, cables, or adapters to the secondary Thunderbolt 3 port on the rear of the docking station.

About USB power delivery 2.0

USB power delivery 2.0 is a specification that allows power (up to 100 watts) to be sent over a USB-C or Thunderbolt 3 cable that supports the specification.

The docking station supports USB power delivery 2.0, delivering up to 15 watts of power to each Thunderbolt 3 USB-C port.

Thunderbolt temperature

Due to the high-performance of Thunderbolt technology, Thunderbolt products sometimes generate more heat than traditional hardware. Therefore, it's normal for the docking station to warm up when in use. As such, it's recommended that you don't place your laptop on the docking station's surface, as doing so will result in even higher temperatures.

These higher temperatures do not represent a safety hazard to users or to hardware.

About USB 3.0 and USB 3.1 Gen 1

USB 3.0 is also known as USB 3.1 Gen 1. This connectivity standard offers speeds up to 5Gbps. Any mention of USB 3.0 in this manual or on the StarTech.com website for TB3DK2DPW or TB3DK2DPWUE refers to the 5Gbps USB 3.1 Gen 1 standard. Any mention of USB 3.1 Gen 2 refers to the 10Gbps Gen 2 standard.

About the docking station USB-C ports

Not all USB-C ports support the full functionality of the USB Type-C™ standard. Some ports might only provide data transfer, and might not support video (DP alt mode) or USB power delivery 2.0.

The docking station includes two USB-C ports:

- **Front-panel USB-C port:** This is not a Thunderbolt 3 port. It's a USB-C port that lets you connect peripherals using USB 3.0 (5Gbps) technology. This port supports data throughput only. The port does not support DP alt mode or USB power delivery 2.0.
- **Rear panel Thunderbolt 3 USB-C port(s):** These USB-C ports are Thunderbolt 3 ports with a USB-C connector. One port is for connection to a host laptop, while the second can be used as a Thunderbolt 3 port or a USB-C port. When used as a USB-C port, it lets you connect peripherals using USB 3.1 Gen 2 (10Gbps) technology. This port supports DP alt mode, and USB power delivery 2.0, up to 15 W.

Note: Either of the Thunderbolt 3 USB-C ports on the docking station can be used to connect to your host laptop.

About the docking station ports

The USB-A (USB 3.0) port located at the back of the docking station is a standard USB 3.0 throughput port. When the dock is connected to a host laptop, this port provides a trickle charge to a selection of USB-charged devices.

The front USB-A (USB 3.0) port is compliant with Battery Charging Specification Revision 1.2 (BC1.2), which means that you can use the port to connect and charge a

device faster than you can using a traditional standard USB 3.0 port.

This front USB 3.0 port can fast-charge a connected device even when the dock isn't connected to a host laptop. When the docking station is connected to a host laptop, the front USB 3.0 port functions as a Charging Downstream Port (CDP), which has simultaneous charge and sync capabilities.

The provided power adapter must always be connected to the docking station in order to charge a device using the front-panel USB fast-charge port.

Install the docking station

The docking station is natively supported when connected to a compatible operating system (see the **System requirements** section for supported operating systems). It should automatically detect and install the required drivers once connected to a Thunderbolt 3 port on your host laptop.

Power the docking station

1. Select the appropriate power cord for your region and connect it to the power adapter.
2. Connect the power adapter to an AC electrical outlet and then to the docking station's **DC IN** (power input) port. The docking station should now be receiving power.

Connect the docking station

1. Connect your external display(s) to the docking station (example, DisplayPort or Thunderbolt 3 displays).

Note: See the **Configure a display device** section for dual-display configuration requirements.

2. Connect your peripherals to the docking station (example, USB devices, RJ 45 network).
3. Connect the provided Thunderbolt 3 cable to a Thunderbolt 3 port on your host laptop and to one of the **Thunderbolt 3 USB-C** ports on the docking station.

Note: Either of the Thunderbolt 3 USB-C ports on the docking station can be used to connect to your host laptop.

Install the drivers

Once the docking station is powered and connected to your host laptop, the required drivers should automatically install.

You might see a pop-up message requesting permission to allow the docking station to connect to your computer. If you see this pop-up message, do the following:

1. Click on the pop-up message.
2. On the following prompt, select **Always Connect** from the drop-down list.
3. Click **OK**. If required, follow any other on-screen instructions to complete the installation.

The drivers can also be found under the **Support** tab on our website at www.startech.com/TB3DK2DPW or www.startech.com/TB3DK2DPWUE.

Charge a device

If you're only using the front USB 3.0 port to charge a device, a connection to a host laptop isn't required.

- To charge a device, connect it to the USB 3.0 port located on the front of the docking station.

Note: This front USB 3.0 port can only fast-charge connected devices that comply with USB Battery Charging Specification Revision 1.2.

Configure a display device

Use your Windows operating system to adjust display settings for multiple monitors. Your laptop hardware must support dual external displays through its Thunderbolt 3 port.

Connect a display to the DisplayPort port

The docking station's DisplayPort connection supports DisplayPort 1.2, as well as DP++. Because the port supports DP++, you can use passive adapters or cables to connect different types of monitors to the DisplayPort port.

Type of Display	Adapter Needed (sold separately)
DisplayPort	None
HDMI	DisplayPort to HDMI 4K Audio / Video Converter (DP2HD4KS)
DVI	DisplayPort to DVI Adapter (DP2DVI2)
VGA	DisplayPort to VGA Adapter (DP2VGA2)

Connect a display to the Thunderbolt 3 USB-C port

You can also connect a display (or a display adapter) to one of the docking station's **Thunderbolt 3 USB-C** ports. One of the docking station's Thunderbolt 3 ports must remain connected to your host laptop.

Type of Display	Adapter Needed (sold separately)
DisplayPort	USB-C to DisplayPort Adapter Cable - 4K 60Hz (CDP2DPMM1MB)
HDMI	USB-C to HDMI Adapter - 4K 60Hz (CDP2HD4K60)
DVI	USB-C to DVI Adapter (CDP2DVI)
VGA	USB-C to VGA Adapter (CDP2VGA)

Visit www.StarTech.com for a range of USB-C video adapters and cables.

Note: The docking station lets you connect two 4K displays, or a single 5K display.

Video adapters sometimes limit the maximum available resolution. Check the documentation of the video adapter to determine its maximum supported resolution.

Connect multiple Thunderbolt 3 displays in a daisy chain

You can also set up dual displays using multiple Thunderbolt 3 displays in a daisy-chain configuration.

Example: You can connect a Thunderbolt 3 display to the **Thunderbolt 3 USB-C port** on the docking station. You can then connect another Thunderbolt 3 device, such as a second Thunderbolt 3 display, through the first Thunderbolt 3 display.

Supported video resolutions

Thunderbolt technology supports both video and data throughput. However, it prioritizes video bandwidth to help ensure seamless display performance. The performance of the remaining dock functions depends entirely on the display configuration you used.

The docking station supports the follow maximum resolutions:

Number of Displays	Ports	Maximum Resolution
1	DisplayPort port	4096 x 2160p (60Hz)
1	Thunderbolt 3 USB-C port	5120p x 2880p (60Hz)
2	DisplayPort port and Thunderbolt 3 USB-C port	4096 x 2160p (60Hz) and 4096 x 2160p (60Hz)

- Depending on the configuration and the supported resolutions of your connected monitor(s), the docking station can support video resolutions lower than specified above.
- In a multi-display configuration, set the refresh rates on each of your connected monitors to the same values, otherwise your monitors might not properly display.
- Video output capabilities are dependent on the video card and hardware specifications of your connected host laptop.

Bandwidth allocation

Thunderbolt technology carries video and data bandwidth, and it prioritizes video bandwidth to help ensure seamless display performance. The performance of the remaining dock ports (for example, the USB 3.0 ports) depends entirely on the display and I/O (input and output) configuration that you have used.

When multiple high-resolution displays are connected, the docking station needs to allocate additional bandwidth to the displays, and the extra bandwidth is reallocated from the other I/O ports on the docking station. In this situation there is less bandwidth available for the remaining ports (for example, the USB 3.0 ports).

The bandwidth allocation table outlines the approximate download bandwidth allocation values. The allocation amount depends on the number and the resolution of your connected displays.

Video and I/O Configuration	DisplayPort Resolution	Thunderbolt 3 USB-C Resolution	I/O Bandwidth Remaining
Data only (No Displays)	N/A	N/A	Download: 22Gbps Upload: 22Gbps
DisplayPort (Single Display - 4K)	4096 x 2160p (4K - 60Hz)	N/A	Download: 22Gbps Upload: 22Gbps
Thunderbolt 3 USB-C (Single Display - 4K)	N/A	4096 x 2160p (4K - 60Hz)	Download: 22Gbps Upload: 22Gbps
Thunderbolt 3 USB-C (Single Display - 5K)	N/A	5120p x 2880p (5K - 60Hz)	Download: 18Gbps Upload: 22Gbps
DisplayPort and Thunderbolt 3 USB-C (Two Displays - Dual-4K)	4096 x 2160p (4K - 60Hz)	4096 x 2160p (4K - 60Hz)	Download: 8Gbps Upload: 22Gbps

Notes

- The indicated bandwidth values are approximate, values depend on several variables including the number, type, resolution, and refresh rate of your connected display(s).
- When connecting a display to one of the Thunderbolt 3 USB-C ports, a USB-C video adapter may be required, depending on the input of your display.

Troubleshooting

If you are experiencing issues, there are some quick tests that you can complete to narrow down the source of the issue.

Update your computer to use Thunderbolt 3

Visit <http://thunderbolttechnology.net/updates> and look for your computer in the list of affected computers. If your computer is listed, then you must update your computer for its Thunderbolt 3 ports to function properly. To update your computer, follow the instructions on the website or contact your manufacturer.

Verify that your components are Thunderbolt compliant

1. Make sure that you are using Thunderbolt compliant cables. First-generation Thunderbolt and Thunderbolt 2 use the same connector type as Mini DisplayPort. If you are using a Mini DisplayPort cable that is not Thunderbolt compliant, replace the cable with one that is compliant.
2. Make sure that the port on your computer is Thunderbolt 3 compliant. Thunderbolt 3 uses the USB-C connector type, but not all USB-C connectors are compatible with Thunderbolt 3. If you are using a USB-C port that is not Thunderbolt 3 compliant, switch to a port that is Thunderbolt 3 compliant.
3. Make sure that your peripheral is Thunderbolt compliant. If you're not sure, check with the manufacturer.

Replace the Thunderbolt cable

- Use the Thunderbolt peripheral with a different cable that is Thunderbolt compliant.

Test the Thunderbolt peripheral

1. Use a second Thunderbolt peripheral, and see if it works. Ideally, the second peripheral is one that you know works in other setups. If the second peripheral works in the current setup, then there is probably an issue with the first Thunderbolt peripheral.
2. Use the Thunderbolt peripheral with a second setup. If it works in the second setup, then there is probably an issue with the first setup.

Technical support

StarTech.com's lifetime technical support is an integral part of our commitment to provide industry-leading solutions. If you ever need help with your product, visit www.startech.com/support and access our comprehensive selection of online tools, documentation, and downloads.

For the latest drivers/software, please visit www.startech.com/downloads

Warranty information

This product is backed by a two-year warranty.

StarTech.com warrants its products against defects in materials and workmanship for the periods noted, following the initial date of purchase. During this period, the products may be returned for repair, or replacement with equivalent products at our discretion. The warranty covers parts and labor costs only. StarTech.com does not warrant its products from defects or damages arising from misuse, abuse, alteration, or normal wear and tear.

Limitation of Liability

In no event shall the liability of StarTech.com Ltd. and StarTech.com USA LLP (or their officers, directors, employees or agents) for any damages (whether direct or indirect, special, punitive, incidental, consequential, or otherwise), loss of profits, loss of business, or any pecuniary loss, arising out of or related to the use of the product exceed the actual price paid for the product. Some states do not allow the exclusion or limitation of incidental or consequential damages. If such laws apply, the limitations or exclusions contained in this statement may not apply to you.

Hard-to-find made easy. At StarTech.com, that isn't a slogan. It's a promise.

StarTech.com is your one-stop source for every connectivity part you need. From the latest technology to legacy products — and all the parts that bridge the old and new — we can help you find the parts that connect your solutions.

We make it easy to locate the parts, and we quickly deliver them wherever they need to go. Just talk to one of our tech advisors or visit our website. You'll be connected to the products you need in no time.

Visit www.startech.com for complete information on all StarTech.com products and to access exclusive resources and time-saving tools.

StarTech.com is an ISO 9001 Registered manufacturer of connectivity and technology parts. StarTech.com was founded in 1985 and has operations in the United States, Canada, the United Kingdom and Taiwan servicing a worldwide market.