



## **IDEAL APPLICATIONS**

HTPC and small form factor PCs High-resolution gaming and multimedia Demanding graphics applications

### **HIGHLIGHTS**

Very high cooling efficiency 135mm silence-optimized be quiet! fan Connected baseplate and fins Space-saving top-flow design Compatible with Intel® and AMD™

#### **Compact Cooling, Significantly Quiet**

be quiet! Shadow Rock TF 2 is the perfect cooler for PC systems with restricted space. It offers the best mix of performance and price in the premium compact CPU cooler segment.

#### Highlights »

- Very high cooling capacity of 160W TDP
- Space-saving top-flow design fits into cases with limited installation space
- Direct connection of baseplate to cooling fins for fast heat transfer
- Small, diagonally arranged fins create an airflow that also ensures perfect cooling for components around the socket
- Silence-optimized 135mm be quiet! fan (max. 24.4db(A)) with durable rifle-bearing technology
- Five high-performance 6mm heat pipes with aluminum heat pipe caps
- Compatibility with Intel® and AMD™ sockets
- 3-year manufacturer's warranty
- Product conception, design and quality control in Germany


#### Shadow Rock TF 2 »

If you seek the best possible mix of performance and price in the premium compact CPU cooler segment, Shadow Rock TF 2 has to be your choice.



# **SHADOW** ROCK TF 2

COMPACT COOLING, SIGNIFICANT QUIET

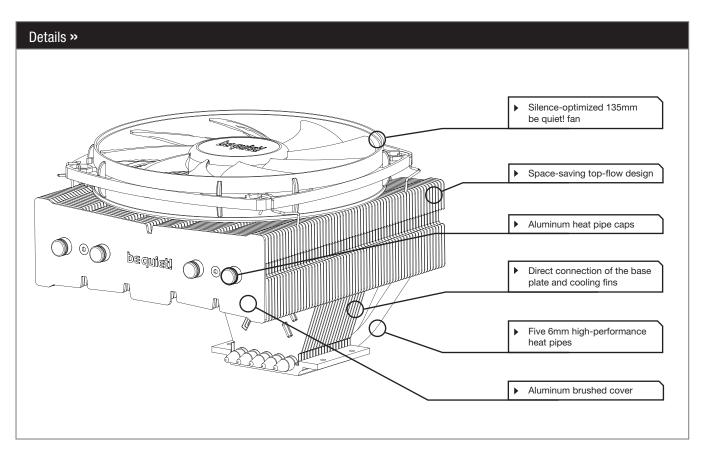

Technical data for complete cooler unit »	
Type of cooler	Shadow Rock TF 2
Model number	BK003
Dimensions, incl. fan (L x W x H in mm)	137 x 165 x 112
Weight, incl. fan (g)	680
Heat sink material	Aluminum
Socket compatibility	Intel®: 775 / 1366 / 1150 / 1151 / 1155 / 1156 / 2011(-3) Square ILM AMD™: AM2(+) / AM3(+) / AM4 / FM1 / FM2(+)
Maximum power capacity (W TDP)	160
Number of heat pipes / diameter (mm)	5/6
Noise level (dB(A)) @ 50 / 75 / 100%	11.9 / 19.3 / 24.4
Technical data for be quiet! PWM fan »	
Fan dimension (mm)	135 x 135 x 22
Fan motor technology	4-pole
Bearing type	Rifle
Fan speed (rpm) @ 100% PWM	1,400
Noise level (dB(A)) @ 2,000rpm	20.8
Airflow (cfm; m3/h)	67.8 ; 113.8
Air pressure (mm / H2O)	2.1
Input current (A)	0.11
Connector	4-pin PWM
Lifespan (h)	80,000
Accessories	Thermal grease (already applied to cooler), mounting kit for Intel® and AMD™, Manual (EN, DE, FR, PL, ES, RU)



# Contact »

Service Hotline: +49 40 7367 686 44

(Mondays to Fridays from 9:00am to 5:30pm CET)

Mail: service@bequiet.com