




22" PCAP 10pt touch screen featuring IPS technology

ProLite T2234MSC uses Projective Capacitive Touch Technology, built into an eye catching bezel with Edge to Edge glass. Featuring IPS LCD Screen technology, it offers exceptional colour performance and wide viewing angles, making it a perfect display for Interactive Digital Signage. In addition to the superb Full HD image quality, the screen is suitable for demanding environments. It comes with a rugged bezel and an IP65 rating, which means it is dust and water resistant. The ProLite T2234MSC is the ideal solution for Interactive Digital Signage, Instore Retail, POS, Kiosks and Gaming.

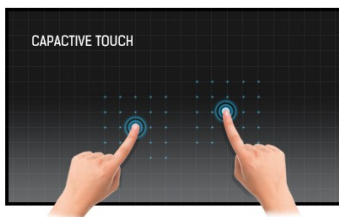

### TOUCH TECHNOLOGY - CAPACITIVE

This technology uses a sensor-grid of micro-fine wires integrated into the glass that covers the screen. Touch is detected because electrical characteristics of the sensor grid change when human finger is placed on the glass. Thanks to the glass overlay this technology is highly durable, and the touch function remains unaffected even if the glass is scratched. It offers perfect picture performance and will work with human finger (also latex gloved) and stylus-pen.



### IPS

IPS technology offers higher contrast, darker blacks and much better viewing angles than standard TN technology. The screen will look good no matter what angle you look at it.

## 1. DISPLAY CHARACTERISTICS

DIAGONAL	21.5"; 55cm
ASPECT RATIO	16 : 9

PANEL	IPS LED
NATIVE RESOLUTION	Full HD 1080p, 1920 x 1080 ( 2.1 megapixel)
BRIGHTNESS	250 cd/m <sup>2</sup> typical
BRIGHTNESS	220 cd/m <sup>2</sup> with touch panel
CONTRAST	1 000 : 1 with touch panel
RESPONSE TIME	8 ms
VIEWING ZONE	horizontal/vertical: 178° / 178° ; right/left: 89° / 89° ; up/down: 89° / 89°
DISPLAY COLOUR	16.7 million
TOUCHTECHNOLOGY	projective capacitive, multi touch (10 compatible touch points - supported only under Windows® 7/8/10), activated by finger
TOUCH POINTS	10
GLASS THICKNESS	1.5 mm
GLASS HARDNESS	6H minimum
LIGHT TRANSMITTANCE	87%
DISPLAY AREA H X W	268.1 x 476.6 mm; 10.6" x 18.8"
PIXEL PITCH H X V	0.247 x 0.247 mm
HORIZONTAL SYNC	31.5 - 82.3 KHz
VERTICAL SYNC	56 - 75 Hz
SYNCHRONIZATION	Separate Sync

## 2. INTERFACES & CONNECTORS

ANALOG INPUT CONNECTOR	VGA
DIGITAL INPUT CONNECTOR	DVI
HDCP	yes;
HEADPHONE CONNECTOR	Yes
CONTROLS	USB (touch)

## 3. FEATURES

PLUG & PLAY	VESA DDC2B™
CONTROLS	On-Screen-Display in 7 languages (DE, EN, ES, FR, IT, JP, Chinese - traditional and simplified) and 5 front controls (Menu, Scroll up/ Brightness, Scroll down/ Mute, Select/ Auto, Power)
USER CONTROLS	contrast, brightness, auto adjust, H.position, V.position, H.size, fine, OSD H.position, OSD V.position, OSD timeout, reset, input select, OSD language, colour temperature, volume, mute
SPEAKERS	2 x 3 W (Stereo)
REGULATIONS	CE, TÜV-Bauart, cULus, VCCI, CU
TILT ANGLE	90° up; 5° down
VESA MOUNTING	100 x 100 mm

COLOUR	Black
WATER AND DUST PROTECTION	IP65

## 4. ACCESSORIES

DRIVER	multi-touch: Windows 7/8/10 (HID compliant), Linux, single-touch: Vista, XP, 9X, CE, Mac (OSX)
INCLUDED ACCESSORIES	power cable, AC adapter, VGA signal cable, DVI signal cable, USB cable, audio cable, Touch Panel Driver Disk (CD-ROM), quick start guide, safety guide
OPTIONAL ACCESSORIES	remote control OSD key

## 5. POWER MANAGEMENT

POWER SUPPLY	DC 12V
POWER SUPPLY UNIT	external
POWER USAGE	27 W typical; max. 2 W in Power management mode
POWER MANAGEMENT	VESA DPMS

## 6. EU ENERGY EFFICIENCY LABEL


VISIBLE SCREEN DIAGONAL	55 cm; 21.5"; (" segment )
-------------------------	----------------------------

*This is information under Regulation (EU) No 1062/2010.*

*\*Based on the power consumption of the television operating 4 hours per day for 365 days. The actual energy consumption will depend on how the television is used.*

## 7. DIMENSIONS & WEIGHT

DIMENSIONS W X H X D	517.5 x 351.5 x 219 mm
WEIGHT	7.2 kg

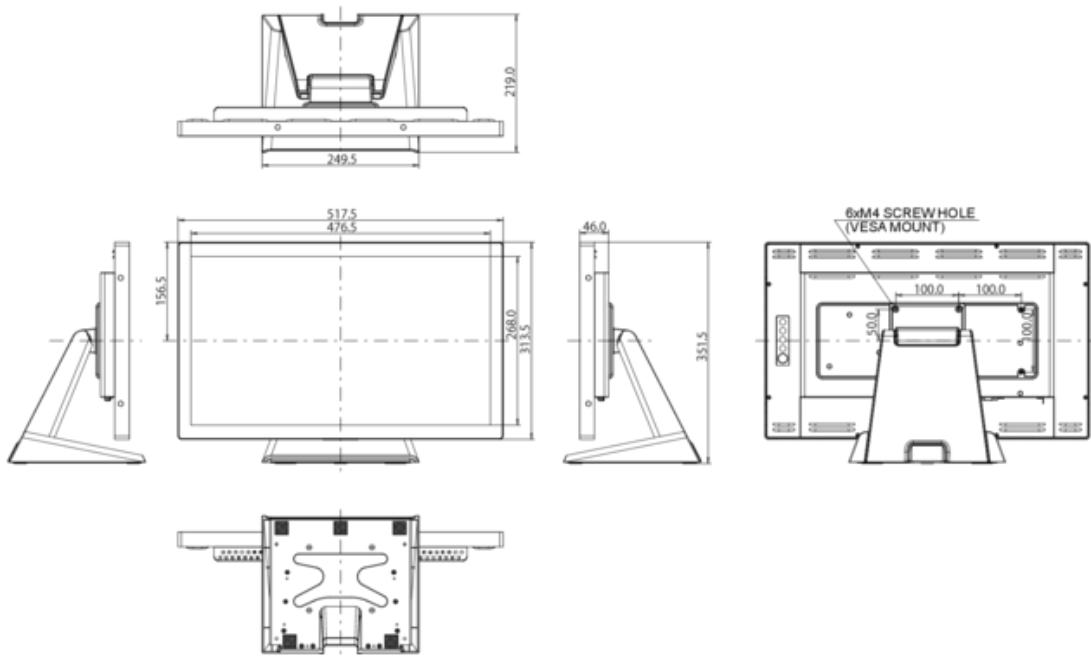

All trademarks and registered trademarks acknowledged. E & O E. Specification subject to change without notice. All LCD's comply with ISO-9241-307:2008 in connection with pixel defects.

© IIYAMA CORPORATION ( ). ALL RIGHTS RESERVED.