

Matrox **M-Series**

M9120 PCIe x16 • M9120 Plus LP PCIe x1 or x16 •
M9125 PCIe x16 • M9128 LP PCIe x16 • M9138 LP PCIe x16 •
M9140 LP PCIe x16 • M9148 LP PCIe x16 • M9188 PCIe x16

User Guide

20070-301-0116
2009.11.02

Contents

About this user guide	4
Using this guide.....	4
More information	4
Overview	5
Hardware supplied.....	5
Software available.....	5
Minimum system requirements.....	5
Installation overview.....	6
Installing your graphics hardware	7
Before you begin	7
Step-by-step installation.....	8
Securing the bracket of your Matrox card	10
Replacing brackets on your graphics card	10
DisplayPort low-profile graphics cards.....	11
Connecting your monitors	12
Before you begin	12
Step-by-step connection setup	13
Installing your Matrox software	20
Before you begin	20
Hardware detection	21
Installing your display driver.....	21
Matrox PowerDesk software	22
Accessing PowerDesk.....	22
Accessing Matrox PowerDesk help.....	22
Troubleshooting.....	23
What to do if you have a problem.....	23
Common problems and solutions	23
Product information	35
Specifications	35
Notes.....	36
Digital flat panel information	37

Customer support	38
Matrox Web	38
Technical support	38
Driver and software download.....	39
Register your Matrox product.....	39
Warranty	40
Software license agreement	42
Index	43

About this user guide

Your Matrox user guide provides information on installing and using your Matrox hardware. For information on Matrox PowerDesk software features and options, see the help file included with your PowerDesk software.



Note: This guide has references specific to version 2.08.00 or later of the Matrox display driver. If you're using a previous version of the Matrox display driver, certain references in this guide may not reflect the software you have.

Using this guide

This guide assumes you're familiar with basic functions like click, right-click and double-click, and that you're familiar with the basics of the operating system you're using. Also, we use the following conventions:

- **Bold** for headings and for references to text that appears on-screen.
- *Italics* for emphasis, file names, paths, publication titles, and new terms.
- Keyboard keys in square brackets, with a plus sign separating keys that you press simultaneously. For example: press [Ctrl]+[Alt]+[Del] to start Windows Task Manager.
- Arrows (“→”) to separate ordered directions. For example, “click **OK** → **Close** → **OK**” is the same as “click **OK**, then click **Close**, then click **OK**”.
- Green for cross-references. If you're viewing online, click green text to jump to what's being referenced.

More information

We provide additional information in help and *Readme* files. Be sure to check for any last-minute release notes included with your product. Also, check the Matrox Web site (www.matrox.com/graphics) for the latest Matrox software, technical support, and product information.

Overview

Thank you for purchasing a Matrox M-Series graphics card. This is a high-performance graphics card that supports PCIe (PCI Express) ×1 or ×16 compliant systems and multi-monitor setups.

Hardware supplied¹

- M9120 PCIe ×16 – Matrox graphics card, 2 DVI to HD-15 adapters.
- M9120 Plus LP PCIe ×1 or ×16 – Matrox graphics card, 1 dual-monitor cable (LFH-60 to DVI), 2 DVI to HD-15 adapters.
- M9125 PCIe ×16 – Matrox graphics card, 2 DVI to HD-15 adapters.
- M9128 LP PCIe ×16 – Matrox graphics card.
- M9138 LP PCIe ×16 – Matrox graphics card, 3 mini DisplayPort to DisplayPort adapters.
- M9140 LP PCIe ×16 – Matrox graphics card, 1 quad-monitor cable (KX20 to DVI), 4 DVI to HD-15 adapters.
- M9148 LP PCIe ×16 – Matrox graphics card, 4 mini DisplayPort to DisplayPort adapters, 4 DisplayPort to DVI-D adapters.
- M9188 PCIe ×16 – Matrox graphics card, 8 mini DisplayPort to DisplayPort adapters, 8 DisplayPort to DVI-D adapters.

Software available

- **Matrox PowerDesk** – to use your Matrox graphics hardware. Matrox provides 32-bit and 64-bit versions of the display driver. Matrox PowerDesk software supports Windows 7, Windows Vista, Windows Server 2008, Windows XP, Windows Server 2003, and Windows 2000.

Minimum system requirements

- A system with PCI Express (PCIe) support
- 1 GHz 32-bit (×86) or 64-bit (×64) processor
- Windows 7 – 1 GB of RAM or higher

¹ The hardware supplied with your Matrox product may vary depending on the SKU or part number of your product. For more information, contact your Matrox representative.

- Windows Vista – 512 MB of RAM or higher, Service Pack 2
- Windows XP – 128 MB of RAM or higher, Service Pack 3

Installation overview



Note: If your Matrox product is already partially or fully installed on your computer, some or all the installation information in this guide may not apply to you. However, this information may be useful if you need to reinstall your Matrox product.

To install your Matrox product:

- 1 Install your Matrox graphics hardware – [see page 7](#).
- 2 Connect your monitors – [see page 12](#).
- 3 Install your Matrox software – [see page 20](#).

Installing your graphics hardware

This section describes how to install your Matrox card. For information specific to your computer, like how to remove its cover, see your system manual.



Note: Most Matrox low-profile graphics cards ship with ATX brackets compatible with most systems. If you have a low-profile system, you may need to change the ATX bracket on your graphics card to a low-profile bracket. For more information, [“Replacing brackets on your graphics card”, page 10.](#)

Before you begin

To avoid personal injury and to prevent damage to your computer or Matrox hardware, read the following guidelines before installing your Matrox graphics hardware.

Preventing damage to your graphics hardware

- Always turn off your computer, unplug it, then wait for it to cool before touching any of the internal parts of your computer or installing your Matrox product.
- While your computer is turned off but still plugged in, some electrical current is supplied to the motherboard. This current may prevent newly installed hardware from working properly.
- Static electricity can severely damage electronic parts. Before touching any electronic parts, drain static electricity from your body (for example, by touching the metal frame of your computer).
- When handling a card, carefully hold it by its edges and avoid touching its circuitry.
- Always try to insert or remove your card as straight as possible.

Step-by-step installation

1 Open your computer and remove your existing graphics card*


If a graphics card *isn't* already installed in your computer, skip to [step 2](#).

- a** Using **Programs and Features** (Windows 7/Vista) or **Add/Remove Programs** (Windows XP/2000) in the Windows **Control Panel**, remove any currently installed display drivers.

Restart your computer for the changes to take effect.


After your computer restarts, you're prompted to install drivers for the new graphics hardware detected. Click **Cancel**.

- b** Turn off your computer and all peripherals such as your monitor or printer.
- c** Open the computer and remove your existing graphics card (if any). (If graphics hardware is built into the motherboard of your computer, you may need to disable it manually. For more information, see your system manual.)

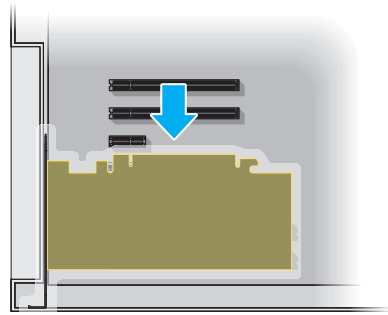

2 Choose an expansion slot

Most computers have different types of expansion slots. Choose a PCI Express (PCIe) ×16 or ×1 slot depending on the type of card you have. Your system manual should identify the location of each type of expansion slot in your computer.

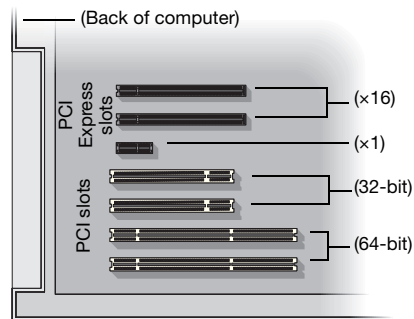


Note: We recommend using a PCIe ×16 slot with 16 lane support. If your system has multiple PCIe ×16 slots, your choice of PCIe slot may affect your card or system performance. For more information, see your computer manual.

* With multi-display mode, you may be able to use your existing graphics card. For Windows XP/2000, see Windows XP/2000 online help under "Install additional monitors". For Windows Vista, see the Vista online help under "Add a second monitor".




WARNING: Inserting your Matrox card into the wrong type of slot could damage your card, your computer, or both.

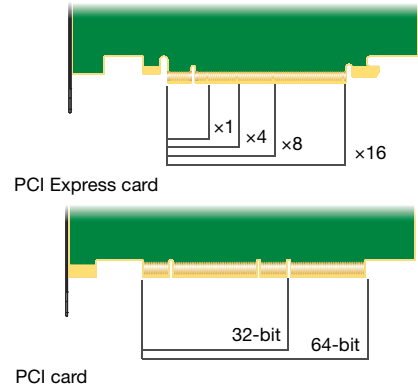

3 Insert your Matrox card

- a Position your Matrox card over the expansion slot you've chosen.
- b Push the card in firmly and evenly until it's fully seated in the slot.
- c Secure the bracket of your Matrox card to the computer frame.


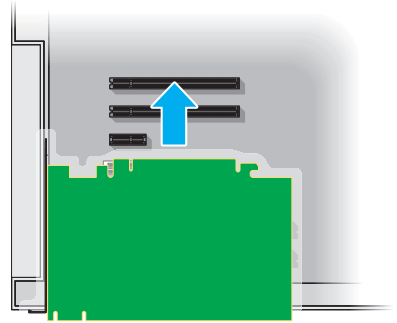


Your Matrox card is now installed. *Before restarting your computer*, connect your monitor or monitors (see “Connecting your monitors”, page 12). *After connecting*, restart your computer and install your Matrox software (see “Installing your Matrox software”, page 20).

Securing the bracket of your Matrox card

Matrox M9140 only – To support the weight of your quad-monitor cable and avoid damaging your graphics card, you also need to secure a washer to the bracket of your graphics card.

- 1 To secure the washer, slip it over the monitor connector, then screw the washer onto the bracket of your graphics card.
- 2 Make sure the washer lies flat against the frame of your computer.

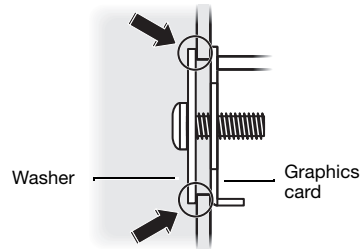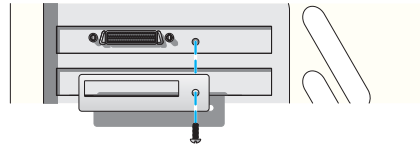


Replacing brackets on your graphics card

Most Matrox low-profile graphics cards ship with ATX brackets compatible with most systems.


Low-profile graphics cards

The following explains how to change brackets on your Matrox low-profile product.

- 1 Remove the current bracket from your Matrox graphics card by removing the screw on top of the graphics card, then the nuts on either side of the monitor connector.

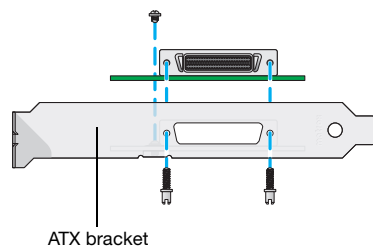



- 2 Attach and fasten the new bracket with the two nuts you just removed.



DisplayPort low-profile graphics cards

The following explains how to change brackets on your Matrox DisplayPort low-profile product.

- 1 Remove the current bracket from your Matrox graphics card by removing the two screws on top of the graphics card.
- 2 Attach and fasten the new bracket with the two screws you just removed.

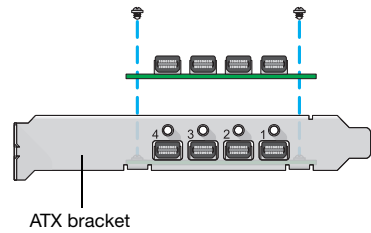

Connecting your monitors

This section describes how to connect your monitors to your Matrox graphics hardware. Depending on your Matrox product, your connection setup changes (see “[Step-by-step connection setup](#)”, page 13).



Note: To purchase any cables or adapters not included with your Matrox product, see the Matrox online store (<http://shopmatrox.com>).

Before you begin

To avoid possible problems that could damage your monitors or prevent you from using your Matrox product, read the following guidelines before connecting your Matrox graphics hardware.

- Whenever you change your connection setup, make sure you're using the correct connectors and that all connectors are properly fastened.
- Don't change monitor connections while your computer is turned on. While your computer is turned on, it may be using monitor settings that are specific to the current monitor connections. *Some* devices may be permanently damaged if incorrect settings are used.
- Whenever you restart your computer, make sure your monitors are already turned on. Otherwise, the software may not be able to properly detect your monitors.

Step-by-step connection setup

This section guides you through the step-by-step connection setup of your graphics hardware.


M9120 PCIe or M9125 PCIe

1 Connect the first monitor

Connect your preferred monitor to the main connector (A) on your Matrox graphics card.

If your monitor has a DVI connector, connect it directly to the main connector of your graphics card.


If your monitor has an HD-15 connector, use the DVI to HD-15 adapter included with your Matrox product to connect your monitor to the main connector.

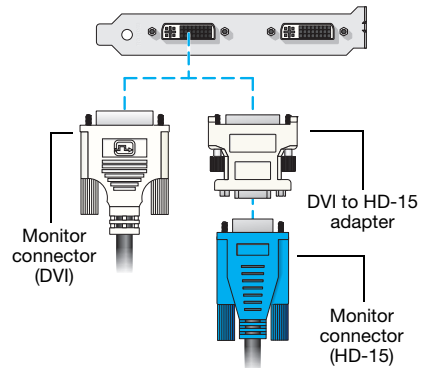

2 Connect the second monitor

If your second monitor uses a DVI connector, connect it directly to the secondary connector (B) of your graphics card.

If your second monitor uses an HD-15 connector, use a DVI to HD-15 adapter included with your product to connect your monitor to the secondary connector.

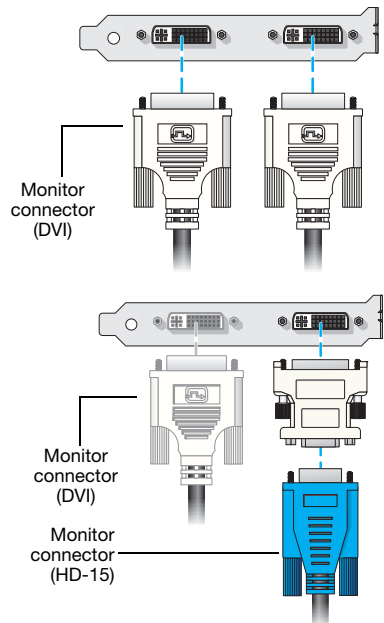


Your Matrox card is now installed. Restart your computer and install your Matrox software (see [“Installing your Matrox software”](#), page 20).

M9120 Plus LP PCIe

1 Attach the dual-monitor cable

Attach your dual-monitor cable to the connector on the bracket of your Matrox card.




WARNING: To avoid damaging the LFH-60 connector on your dual-monitor cable or on your graphics card, carefully insert the connector on your dual-monitor cable as straight as possible into the connector on your graphics card. Specifically, inserting the connectors into each other at an angle is likely to bend and damage the pins on the connector of the dual-monitor cable.

2 Connect your monitors

If your monitor has a DVI connector, connect your monitor cable directly to the dual-monitor cable.

If your monitor has an HD-15 connector, use a DVI to HD-15 adapter included with your product to connect your monitor cable to your dual-monitor cable.

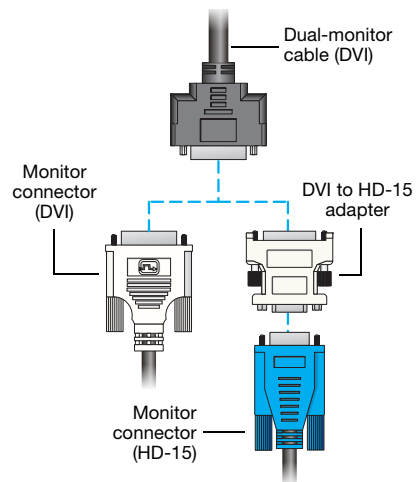


Your Matrox card is now installed. Restart your computer and install your Matrox software (see “Installing your Matrox software”, page 20).

M9128 LP PCIe




WARNING: To avoid damaging the DisplayPort connector on your DisplayPort monitor cable or on your graphics hardware, carefully remove the DisplayPort cable by pressing the latch on the top of the DisplayPort connector while removing the connector.




1 Connect the first monitor

If your monitor has a DisplayPort connector, connect your monitor directly to the DisplayPort connector labeled **1** on the bracket of your Matrox card.




If your monitor has a DVI connector, use a DisplayPort to DVI-D adapter (sold separately) to connect your monitor cable to the DisplayPort connector.

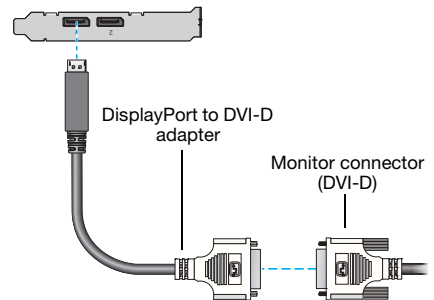


2 Connect the second monitor

If your monitor has a DisplayPort connector, connect your monitor directly to the DisplayPort connector labeled **2** on the bracket of your Matrox card.

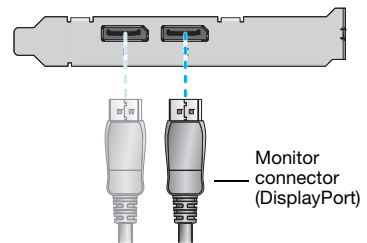

If your monitor has a DVI connector, use a DisplayPort to DVI-D adapter (sold separately) to connect your monitor cable to the DisplayPort connector.

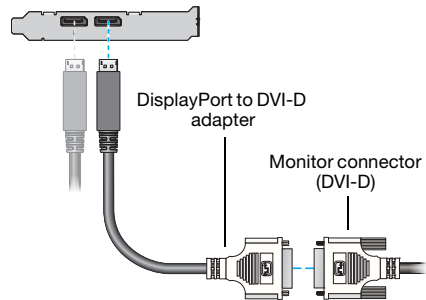


Your Matrox card is now installed. Restart your computer and install your Matrox software (see “Installing your Matrox software”, page 20).

M9138 LP PCIe or M9148 LP PCIe




WARNING: To avoid damaging the DisplayPort connector on your DisplayPort monitor cable or on your graphics hardware, carefully remove the DisplayPort cable by pressing the latch on the top of the DisplayPort connector while removing the connector.




1 Connect the first monitor

If your monitor has a DisplayPort connector, use a mini DisplayPort to DisplayPort adapter included with your product to connect your monitor cable to the mini DisplayPort connector labeled **1** on the bracket of your Matrox card.

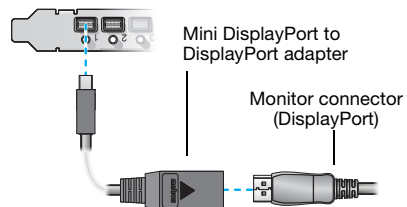


If your monitor has a DVI connector, use a DisplayPort to DVI-D adapter (sold separately for M9138 products) to connect your monitor cable to the mini DisplayPort to DisplayPort adapter.

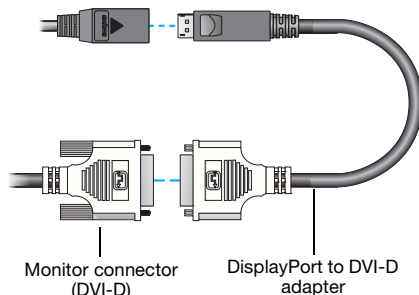

2 Connect the other monitors

Repeat step 1 for each monitor you want to connect.

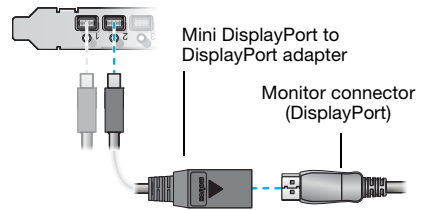


Your Matrox card is now installed. Restart your computer and install your Matrox software (see “Installing your Matrox software”, page 20).

M9140 LP PCIe

1 Connect your quad-monitor cable


Attach your quad-monitor cable to the connector on the bracket of your Matrox card.

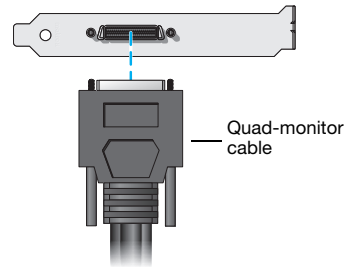

2 Connect your monitors


If your monitor has a DVI connector, connect your monitor cable directly to the quad-monitor cable.

If your monitor has an HD-15 connector, use a DVI to HD-15 adapter included with your product to connect your monitor cable to your quad-monitor cable.

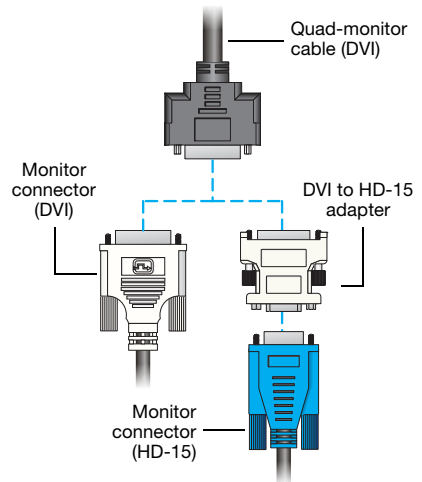



Note: Monitors are numbered consecutively based on which connector each is attached to. Numbering starts with the *primary display* – the one that first displays information when you restart your computer. If another graphics card is installed in your computer, display numbering may be different.




Your Matrox card is now installed. Restart your computer and install your Matrox software (see “Installing your Matrox software”, page 20).

M9188 PCIe




WARNING: To avoid damaging the DisplayPort connector on your DisplayPort monitor cable or on your graphics hardware, carefully remove the DisplayPort connector by pressing the latch on the top of the DisplayPort connector while removing the connector.




1 Connect the first monitor

If your monitor has a DisplayPort connector, use a mini DisplayPort to DisplayPort adapter included with your product to connect your monitor cable to the mini DisplayPort connector labeled **1** on the bracket of your Matrox card.

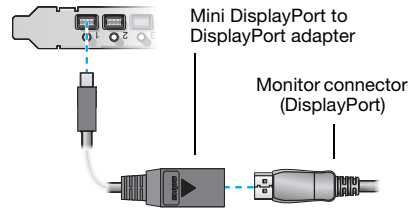


If your monitor has a DVI connector, use a DisplayPort to DVI-D adapter included with your product to connect your monitor cable to the mini DisplayPort to DisplayPort adapter.

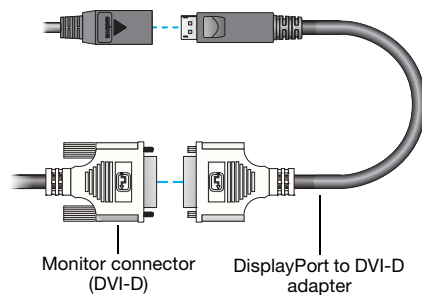

2 Connect the other monitors

Repeat step 1 for each monitor you want to connect.

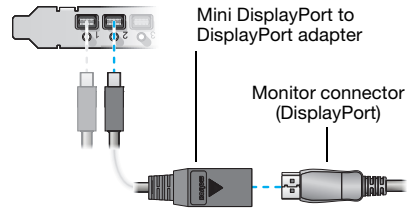

Your Matrox card is now installed. Restart your computer and install your Matrox software (see [“Installing your Matrox software”, page 20](#)).

Installing your Matrox software

This section describes how to install Matrox software for *Windows 7*, *Windows Vista*, *Windows Server 2008*, *Windows XP*, *Windows Server 2003*, and *Windows 2000*. The installation of the display driver is the same for the 32-bit and 64-bit versions.

You may need administrator rights to install certain software. For more information, see Windows documentation or contact your system administrator.

Before you begin

- This guide has references specific to the Matrox CD-ROM. If your Matrox product wasn't packaged by Matrox (for example, if it was included with your computer), your product may not include this CD-ROM.

If you don't have this CD-ROM, certain references in this guide may not reflect the software you have. For more information, see other software documentation provided by your system vendor.

- If your Matrox product was provided by the manufacturer of your computer, check the Web site of that manufacturer for the latest display driver. A display driver provided by the manufacturer of your computer is more likely to be tested with your computer model.
- You may need administrator rights to install or uninstall certain software. For more information, see Windows documentation.

Obtaining a display driver

- Matrox makes the latest display drivers available on the Matrox Technical Support Web site (www.matrox.com/graphics/en/support/drivers).

Selecting the proper display driver

Matrox makes available two types of display drivers. The display driver you install depends on the operating system you're using and the graphics hardware installed in your system:

- **Windows 7/Vista – WDDM** (Windows Vista Display Driver Model) display drivers are designed and optimized for Windows versions beginning with Windows Vista. Select this display driver if you're using either Windows 7 or Windows Vista. Also, select this display driver if you have *only* M-Series graphics hardware installed in your system.

- **Windows 7/Vista/XP/2000 – XDDM** (Windows XP Display Driver Model) display drivers are designed for Windows XP. This is a unified display driver. Select this display driver if you have different models of graphics hardware (for example, a P-Series and an M-Series graphics card) installed in your system.

Hardware detection

- **Windows 7/Vista** – Windows detects new hardware when you restart and installs a standard VGA driver.
- **Windows XP/2000** – Windows detects new hardware when you restart. If Matrox display drivers haven't been previously installed, Windows prompts you to install a display driver. When prompted by the **Found New Hardware** wizard to install a display driver for your graphics hardware, click **Cancel**.

Installing your display driver

Insert the Matrox CD-ROM, then follow the on-screen instructions.

Matrox PowerDesk software



Your Matrox display driver includes Matrox PowerDesk software. This software helps you get the most out of your Matrox product. Use Matrox PowerDesk software to change certain display settings or access Matrox features.



Note: To avoid possible problems, unless otherwise specified, we recommend you use *only* PowerDesk software to change your display settings.

Accessing PowerDesk

To access Matrox PowerDesk:

- Windows 7/Vista/XP/2000 – Click **Start** → **All programs** (or **Programs**) → **Matrox Graphics** → **Matrox PowerDesk**.
- Windows 7/Vista/XP – Right-click your Windows desktop and select **Launch Matrox PowerDesk**.

Accessing Matrox PowerDesk help

For information on Matrox PowerDesk software features and options, see the help file included with your PowerDesk software.

While using Matrox PowerDesk software, you can access the help file in several ways:

- From the main PowerDesk interface, click **Help and Troubleshooting** → **PowerDesk help**.
- For information on a specific feature or control on a page, click the **Help** button (?) on that page.
- To find all topics that contain specific words, use the **Search** tab in the navigation window of the help file.

Troubleshooting

What to do if you have a problem

If you experience problems with your Matrox product:

- Make sure your Matrox card is properly installed, you're using the correct connectors, and that all connectors are properly fastened. For more information, see [“Installing your graphics hardware”](#), page 7 and [“Connecting your monitors”](#), page 12.
- Review the documentation provided with your Matrox product, including the information in this section, to see if your problem is already addressed.

If your problem persists, contact Matrox. For more information, see [“Customer support”](#), page 38.

Common problems and solutions

This section addresses common problems that could prevent you from using your computer or graphics hardware.

Problem Computer doesn't display information or boot after Matrox card is installed

Cause If you have more than one PCIe ×16 slot, your graphics card may be using a slot that doesn't have 16 lane support.

Solution Try moving the PCIe card to another PCIe slot in your computer. For more information on the PCIe support of your system, see your system manual.

Cause There may be unsupported graphics hardware in your computer.

Solution If graphics hardware is built into your computer motherboard, your system may not have automatically disabled it when you inserted your Matrox card. Check your system manual for instructions on how to disable your computer's built-in graphics hardware.

Cause The BIOS of your Matrox graphics card may need to be updated or restored.

Solution For **advanced users** – If your primary display is unusable and you have another VGA-compatible graphics card (PCI):

- 1 Turn off your computer and insert the other graphics card into an expansion slot. For more information on expansion slots, see [“Choose an expansion slot”](#), page 8.

- 2 Plug your monitor into the other graphics card and restart your computer.

i **Note:** Make sure your computer uses the other graphics card to control your primary display. The graphics card that controls your primary display is the one that first displays information when you restart your computer.

Your computer BIOS (Basic Input/Output System) and the slot type (PCI or PCIe – see “Choose an expansion slot”, page 8) of each graphics card help determine which graphics card controls your primary display.

To control which graphics card is used for your primary display, you may be able to change the configuration of your computer BIOS. For information on how to change your computer BIOS settings, see your system manual.

- 3 Download the latest BIOS update for your Matrox product. Matrox makes new BIOS updates available on the Matrox Technical Support Web site (www.matrox.com/graphics/en/support/drivers).
- 4 Run the software package you downloaded. Follow the on-screen instructions.
- 5 After the update is finished, turn off your computer, remove the other graphics card, then plug your monitor into your Matrox graphics card.
- 6 Restart your computer.

Problem Wrong color balance, screen image off-center, or no picture at all

Cause Your monitor video controls may be improperly set.

Solution Adjust your monitor controls (brightness, contrast, and so on). For more information, see your monitor manual.

Cause Your monitor may not be properly connected (the connectors aren't properly fastened or the monitor power cable isn't firmly in place) or may have been disconnected.

Solution Make sure you're using the correct connectors, that all connectors are properly fastened, and that all power cables are firmly in place. For more information, see “Connecting your monitors”, page 12.

Cause If your monitor supports multiple input sources (analog/digital), it may be configured to use the wrong source.

Solution Make sure your monitor is using the correct input source. For more information on selecting the input source for your monitor, see your monitor documentation.

Solution Change your connection setup to use a different input source. For more information, see [“Connecting your monitors”, page 12.](#)

Problem **After the startup screen, or after display settings are changed, the screen image is garbled or unusable**
(blank screen, rolling or overlapping screen images)

Cause **Analog monitors only** – The Matrox display driver may be trying to use settings your monitor doesn’t support. This can happen if the display resolution was changed to one your monitor doesn’t support or if the monitor connected to your computer was changed without changing the display or monitor settings in the software.



WARNING: If incorrect software monitor settings are applied, *some* monitors can be permanently damaged. For more information, see your monitor manual.

Solution Make sure your monitor supports the display mode currently in use. After installing your Matrox product, your system uses either the preferred display mode for your monitor or a display mode of 800 × 600 at 60 Hz.

Solution If none of your displays are available, reinstall your Matrox display drivers. For more information on reinstalling your display driver, see the following solution.

Cause Files on your system may have been deleted or corrupted.

Solution Uninstall, then reinstall Matrox software:




Note: Before removing software, make sure you have all the necessary files to reinstall software that may still be needed. Also, make sure the display driver you reinstall supports *all* Matrox products in your computer. For more information, see [“Selecting the proper display driver”, page 20.](#)



Note: You may need administrator rights to uninstall certain software. For more information, see Windows documentation.

Windows 7/Vista/XP/2000 –

- 1** If your primary display is unusable, restart your computer in VGA mode:
 - a** **Windows 7** – Click **Start**, point to the arrow (), then select **Restart** to restart your computer.

- b** Windows Vista/XP/2000 – Click **Start** → **Shut Down*** → **Restart** → **OK*** to restart your computer.

(* Depending on your version and configuration of Windows, this part of the step may not be necessary.)

If your primary monitor is unusable, see your system manual for information on how to restart your computer using a hardware control.

- c** *Before* Windows starts, press [F8] for the Windows startup menu to appear. (If [F8] doesn't work, instead try pressing and holding [Ctrl] before Windows starts.)
- d** Select "VGA mode" (or "Low resolution video"), then press [Enter].



Note: If your system stops responding while it's in VGA mode, select "Safe mode" instead.

- 2** To uninstall Matrox software:

Windows 7/Vista –

- a** Click **Start** → **Settings*** → **Control Panel** → **Programs*** → **Programs and Features** → **Matrox PowerDesk** (or **Matrox PowerDesk-SE**) → **Uninstall** → **Yes**.

(* Depending on your version and configuration of Windows, this part of the step may not be necessary.)

- b** Click **Matrox Driver** (or **Matrox M-Series Driver**) → **Uninstall** → **Yes**.

Windows XP/2000 –

- a** Click **Start** → **Settings*** → **Control Panel** → **Add/Remove Programs** (double-click*) → **Matrox PowerDesk** (or **Matrox PowerDesk-SE**) → **Change/Remove** → **Yes**.

(* Depending on your version and configuration of Windows, this part of the step may not be necessary.)

- b** Click **Matrox Driver** → **Change/Remove** → **Yes**.

- 3** Restart your computer for the changes to take effect.
- 4** After your computer has restarted, install the latest display driver for your Matrox card. You may also need to reinstall other Matrox software.

Problem Can't use Windows, Windows reports a configuration error, and/or can't install or uninstall Matrox display driver



Note: You may need administrator rights to install certain software. For more information, see Windows documentation.

Cause The problem may be specific to the motherboard in your computer.

Solution There may be a software update available for your motherboard. To find out what motherboard model your computer is using, see your system manual. For more information, contact the maker of your motherboard or computer. Many motherboard or computer manufacturers have software updates available on their Web site.

Cause Files on your system may have been deleted or corrupted.

Solution Uninstall, then reinstall Matrox software. For more information, see [page 25](#).

Problem Monitor settings aren't automatically detected



WARNING: If incorrect software monitor settings are used, your display may become unusable and *some* monitors can be permanently damaged. For more information, see your monitor manual.

Cause Your monitor may not be detected by the software.

Solution Restart your computer. If your monitor is a Plug-and-Play (DDC) monitor, it should be automatically detected by the software.

Problem Built-in network hardware doesn't work after graphics card is installed

Cause The installation of a graphics card may have caused your computer to reallocate system resources.

Solution Try reinstalling your network drivers.

Solution Try moving your Matrox graphics card to another PCIe slot in your computer. For instructions on how to safely install your Matrox card, see “[Installing your graphics hardware](#)”, [page 7](#).

Cause You may be using Windows XP Service Pack 2.

Solution Install Service Pack 3 for Windows XP. To obtain a Microsoft Service Pack, contact your system vendor or see the Microsoft Web site (www.microsoft.com).

Problem Using multiple displays under Windows 7/Vista/XP/2000 program doesn't work with your Matrox product

Cause Your main graphics card may not be controlling your primary display. The graphics card that controls your primary display is the one that first displays information when you restart your computer.

A program that doesn't recognize multiple displays may not work with a graphics card unless it's controlling your primary display.

Your computer BIOS (Basic Input/Output System) and the slot type (PCI or PCIe – see “Choose an expansion slot”, page 8) of each graphics card help determine which graphics card controls your primary display.

Solution If you're having problems with a program that can be moved on your Windows desktop, run this program on your primary display. Make sure the program window doesn't overlap any other display. If the program doesn't work with the graphics card controlling your primary display, or you want your main graphics card to control your primary display, see the other solutions.

Solution **Windows XP/2000 and Windows Server 2003** – If you're having problems with a program that can't be moved on your Windows desktop, try changing your primary display.

- 1** Right-click your Windows desktop background, then click **Properties** → **Settings**.
- 2** Select the display you want as the primary display and enable **Use this device as the primary monitor**.
- 3** Click **OK** or **Apply** for your changes to take effect.

Solution Change the configuration of your computer BIOS so that the slot type of your main graphics card has priority for becoming the primary display. For information on how to change your computer BIOS settings, see your system manual.

If your computer BIOS doesn't let you select which slot type has priority for becoming the primary display, a BIOS update may be available to let you do this. (The BIOS of most computers can be updated with software.) For a possible BIOS update for your computer, contact your system vendor.

Solution If there's a graphics controller built into the motherboard of your computer, by changing your computer BIOS settings, you may be able to change which device controls your primary display. For more information, see your system manual.

Solution If you don't need to use the graphics card that's controlling your primary display, remove it from your computer. If your primary display is controlled by the motherboard of your computer, see your system manual for information on how to disable this graphics controller.

Cause The program you're using may not work properly with systems using more than one display at a time.

Solution An update may be available for the program you're using. This update may fix problems this program has with multi-display systems. For more information, contact the software distributor for the program you're using.

Solution If you're using multiple displays in *independent* mode, try using *stretched* mode instead. Programs that don't work in independent mode may work in stretched mode. For more information, see Matrox PowerDesk help.

Problem **Not all graphics cards in the computer are fully supported**
(Software doesn't work with a certain graphics card, or another graphics card doesn't work at all)

Cause If you have different models of graphics cards in your computer, your Matrox display driver may not support all the graphics cards in your computer.

Solution Under Windows 7/Vista/XP/2000, you can use different XDDM display drivers for different products. Software that depends on a specific display driver feature may not work if your graphics hardware is using different display drivers. For more information, see ["Selecting the proper display driver"](#), page 20.

Solution Disable or remove any graphics hardware not supported by the display driver you want to use. If there's graphics hardware built into the motherboard of your computer that's not supported by your software, see your system manual for information on how to disable this graphics hardware.

Cause Windows 7/Vista/XP/2000 – If the Windows method for display driver installation was used (instead of running the setup program included with your Matrox display driver), the driver may not be installed for all the graphics cards it supports.

Solution Run the setup program included with the Matrox display driver. The setup program automatically installs the display driver for each Matrox graphics card it supports.

Problem **Screen image defects appear, program doesn't run properly, or Windows doesn't work properly**
(example: mouse pointer not drawn properly)

Cause Some programs may not work properly with some Matrox acceleration.

Solution Windows 7/Vista/XP/2000 – Disable Windows effects:

Windows 7 –

- 1 Click **Start** → **Settings*** → **Control Panel** → **System and Security*** → **System** → **Advanced system settings**.

(* Depending on your version and configuration of Windows, this part of the step may not be necessary.)

- 2 Under **Performance**, click **Settings**.
- 3 Disable one or more features.
- 4 Click **OK** → **OK**.

Windows Vista –

- 1 Right-click your Windows desktop background, then click **Personalize** → **Window Color and Appearance**.
- 2 If you're using Windows Aero, click **Open classic appearance properties for more color options**. Under **Color scheme**, select **Windows Vista Basic**.
- 3 Click **Effects** and then disable one or more features.
- 4 Click **OK** → **OK**.

Windows XP –

- 1 Right-click your Windows desktop background, then click **Properties** → **Appearance** → **Effects**.
- 2 Disable one or more features.
- 3 Click **OK** → **OK**.

Windows 2000 –

- 1 Right-click your Windows desktop background, then click **Properties** → **Effects**.
- 2 Disable one or more features under **Visual effects**.
- 3 Click **OK** → **OK**.

Solution Windows Vista – Disable Windows Aero. Right-click your Windows desktop background, then click **Personalize** → **Window Color and Appearance** → **Open classic appearance properties for more color options**. Under **Color**, select **Windows Vista** or **Windows Classic**.

Solution If possible, update your Matrox display driver. Matrox makes new display drivers available on the Matrox Technical Support Web site (www.matrox.com/graphics/en/support/drivers).



Note: If your Matrox product was provided by the manufacturer of your computer, check the Web site of that manufacturer for the latest display driver. A display driver provided by the manufacturer of your computer is more likely to be tested with your computer model.



Note: If you identify a program that doesn't work well with Matrox acceleration, please contact Matrox technical support (see page 38) and describe the problem. This information may help us come up with a fix or work-around in a future driver release.

Problem Program window or dialog box doesn't appear on screen

Cause Another window or dialog box may be covering the window or dialog box you want to see.

Solution Move, close, or minimize any window or dialog box that may be covering the window or dialog box you want to see.

Cause If you're using multi-display mode, the program window or dialog box may be in a display or on a monitor that's unusable. (For example, your monitor may not be properly connected or configured.)

Solution Make sure all the displays and monitors you want to use are usable. For more information, see other troubleshooting items in this guide.

Cause The software may be using a display you didn't intend to use or the software may be configured to use more displays than the actual number of monitors you have.

Solution Disable the display:

Windows 7/Vista/XP/2000 –

- 1** From the main interface of PowerDesk (see "Accessing PowerDesk", page 22), click **Multi-Display Setup**.
- 2** In the work area, select the display you want to disable, and then drag it to the **Unused output(s)** section. (You can also disable the display by right-clicking it and selecting **Remove**.)
- 3** Click **OK** to apply your changes.

Cause The program window or dialog box may be somewhere off-screen.

Solution If the program window you want to see is named on the Windows taskbar, right-click on it and select **Maximize**. (If you click **Restore** the program window goes back to its previous position. To fix this problem, see the other solutions.)

Solution Manually move the program window or dialog box:

- 1 Make sure the window you want to move is selected, then press [Alt]+[Space].
- 2 If you see a pop-up menu, click **Move**. If you don't see a pop-up menu, press [M] (for **Move**).
- 3 Press on one of the arrow keys once and move your mouse pointer to where you want the window or dialog box to appear, then click. The program window or dialog box should appear where you clicked.

Problem **Display on digital monitor appears blurry or uses only a portion of the screen**

Cause You may be using a lower display resolution than what your digital monitor supports. If your monitor supports display scaling, the image on your screen may appear blurry. If display scaling isn't supported, the display may use only a portion of your screen.

Solution Select the highest display resolution available. This generally results in better image quality.

Problem **Can't apply Windows Aero color scheme**

Cause You may be using a display driver designed for Windows XP (XDDM).

Solution Windows Aero is supported only with a display driver designed for Windows Vista (WDDM). For more information, see [“Selecting the proper display driver”](#), page 20.

Cause You may be using a 16-bit color palette.

Solution Try using a 32-bit color palette instead.

Problem **Video file playback is jerky (skipping frames)**



Note: Jerky video file playback may be the result of slow playback or recording. Slow recording causes frames to be dropped (frames aren't recorded). If jerky video is caused by frames that were dropped during recording or by the video settings such as the encoding method, the problem can only be fixed by recapturing the video under better conditions or with different video settings.

Cause Your hard disk may be too slow.

Solution If possible, try using a faster disk.



Tip: If your computer has more than one hard disk, you may get better results if you play back video files from a disk *other than* the one where the Windows swap file is stored. The Windows swap file is usually stored on drive “C:”.

Cause Your video player may not properly support the video file format.

Solution Try using a different video player.

Problem Mouse pointer flickers or disappears when it's over a video window

Cause You may be using a customized mouse pointer. Windows draws customized mouse pointers in a way that may cause them to flicker or disappear while they're over a video window.

Solution Windows 7/Vista/XP/2000 – Use default Windows mouse pointers:

- 1** Windows 7/Vista – Click **Start** → **Settings*** → **Control Panel** → **Hardware and Sound*** → **Mouse** (double-click*).

(* Depending on your version and configuration of Windows, this part of the step may not be necessary.)

Windows XP/2000 – Click **Start** → **Settings*** → **Control Panel** → **Printers and Other Hardware*** → **Mouse** (double-click*).

(* Depending on your version and configuration of Windows, this part of the step may not be necessary.)

- 2** Click the **Pointers** tab.
- 3** In the **Scheme** box, select (or reselect) “**(None)**”, then click **OK**.

Problem Can't play certain videos

Cause The video source may be copy protected.

Solution The media player you're using may not allow you to play back copy-protected video content.

Cause A DVD video may not play back because the region setting on your DVD player doesn't match the region code on the DVD-ROM disc. DVD players and videos use region codes to prevent the playback of video that was intended only for a certain region or market.

Solution To get a copy of a DVD video that's compatible with the region code of your DVD player, contact the vendor of that video.

Problem **Can't record video**

Cause The video source may be copy protected. Your Matrox product may not let you make copies of copy-protected video. (Some video sources let you make a copy of a video, but you may not be able to make a copy of that copy.)

Solution To get copies of a copy-protected video, contact the vendor of the video.

Product information

Specifications

	M9120 PCIe	M9120 Plus LP PCIe	M9125 PCIe	M9140 LP PCIe
Operating systems supported	Windows 7, Windows Vista, Windows Server 2008, Windows XP, Windows Server 2003, and Windows 2000			
Digital monitor support	DVI	DVI	Dual-link DVI	DVI
Memory	512 MB	512 MB	512 MB	512 MB
Card type	PCIe x16	PCIe x1 or x16	PCIe x16	PCIe x16
Form factor	ATX	Low-profile	ATX	Low-profile
Monitors supported	2	2*	2	4
Connectors	2x DVI	1x LFH-60	2x DVI	1x KX20
Maximum analog resolution	2048 x 1536	2048 x 1536	2048 x 1536	1920 x 1200
Maximum digital resolution	1920 x 1200	1920 x 1200	Up to 1920 x 1200, and 2560 x 1600	1920 x 1200
Maximum card dimensions	L: 6.600" / 16.80 cm H: 4.376" / 11.10 cm W: 0.750" / 1.91 cm	L: 6.600" / 16.80 cm H: 2.712" / 6.90 cm W: 0.750" / 1.91 cm	L: 6.600" / 16.80 cm H: 4.376" / 11.10 cm W: 0.750" / 1.91 cm	L: 6.600" / 16.80 cm H: 2.712" / 6.90 cm W: 0.750" / 1.91 cm

* Quad analog display upgrade kit available (see <http://shopmatrox.com>).

	M9128 LP PCIe	M9138 LP PCIe	M9148 LP PCIe	M9188 PCIe
Operating systems supported	Windows 7, Windows Vista, Windows Server 2008, Windows XP, Windows Server 2003, and Windows 2000			
Digital monitor support	DVI, DisplayPort	DVI, DisplayPort	DVI, DisplayPort	DVI, DisplayPort
Memory	1 GB	1 GB	1 GB	2 GB
Card type	PCIe x16	PCIe x16	PCIe x16	PCIe x16
Form factor	Low-profile	Low-profile	Low-profile	ATX
Monitors supported	2	3	4	8
Connectors	2× DisplayPort	3× Mini DisplayPort	4× Mini DisplayPort	8× Mini DisplayPort
Maximum digital (DVI) resolution	1920 × 1200	1920 × 1200	1920 × 1200	1920 × 1200
Maximum DisplayPort resolution	2560 × 1600	2560 × 1600	2560 × 1600	2560 × 1600
Maximum card dimensions	L: 6.600" / 16.80 cm H: 2.712" / 6.90 cm W: 0.750" / 1.91 cm	L: 6.600" / 16.80 cm H: 2.712" / 6.90 cm W: 0.750" / 1.91 cm	L: 6.600" / 16.80 cm H: 2.712" / 6.90 cm W: 0.750" / 1.91 cm	L: 9.000" / 22.86 cm H: 4.407" / 11.19 cm W: 0.750" / 1.91 cm

Notes

- Your Matrox graphics card is 100% VGA compatible and supports all VESA standards: VBE 3.0 (Super VGA modes), DPMS (energy saving), and DDC-2B (Plug-and-Play monitor), DDC-CI, and DisplayPort 1.1a.
- To get the most of your Matrox product, we recommend using the highest color palette setting (a 32-bit color palette) for all your displays.
- The display resolutions and refresh rates available depend on your Matrox graphics card, display driver, software monitor settings, and monitor. For information on the capabilities of your monitor, see your monitor documentation.
- If your digital monitor doesn't support reduced blanking, your screen image may not display properly.
- While using four monitors or more in *stretched* mode, using a resolution higher than 1600 × 1200 may cause tearing or reduced performance during video playback.
- **M9188 PCIe – Windows 7/Vista** – While using Matrox M9188 graphics hardware certain limitations may apply. For more information, see Matrox PowerDesk help.

Digital flat panel information

- TMDS (Transition Minimized Differential Signaling) encoding for DVI connectors
- DDWG (Digital Display Working Group) compliant DVI connector
- EDID (Extended Display Identification Data) 1.2 and 1.3 support
- VESA Display Data Channel (DDC) support
- VESA DisplayPort 1.1a support

Customer support

Matrox Web

Our Web site has product literature, press releases, technical material, a sales office list, trade show information, and other relevant material. Visit the Matrox Graphics Web site at www.matrox.com/graphics.

Technical support

Matrox values your business and offers professional support for your Matrox product. For product support, contact your Matrox representative or visit our technical support Web site at www.matrox.com/graphics/support/.

Information we need

Please give a complete description of the problem, and include:

- Matrox card serial number, model number, revision number, BIOS number, driver type and version, and memory address at which the Matrox card is installed.
- Computer brand and model name.
- Monitor brand and model name.
- Operating system, version, and service pack.
- Brand and model of any other cards and devices installed on your system.

Program specific problems

If a problem appears with a specific program, please give us the following information:

- Display settings (color palette, display resolution, and so on) applied when the problem occurs.
- If possible, take note of the file and segment address that caused the problem.
- Detailed steps known to cause the bug, so we can reproduce it.

Driver and software download

A more recent display driver may support more features and may offer increased capabilities (such as higher display resolutions). Matrox makes the latest display drivers, software, and system utilities available on the Matrox Technical Support Web site (www.matrox.com/graphics/en/support/drivers).

Register your Matrox product

Please register online (www.matrox.com/graphics/en/registration) to be eligible for customer support, new product announcements, and information on special offers and upcoming events.

Warranty

A. Limited Warranty Statement

1. Matrox Graphics Inc. ("Matrox") warrants to the end-user customer, who provides adequate proof of purchase that Matrox hardware products purchased from Matrox authorized dealers will be free from defects in materials and workmanship for a period of three (3) years from the date of purchase. This warranty applies only to the original end-user purchaser and is non-transferable. Conditions and limitations of Matrox's warranty are stated below.
2. Matrox's limited warranty covers only those defects which arise as a result of normal use of the hardware and does not apply to any:
 - a. improper or inadequate maintenance;
 - b. incompatibilities due to the user's hardware or software applications with or in which the Matrox product interfaces;
 - c. product of a special or custom-made nature;
 - d. unauthorized modification or misuse;
 - e. improper installation, misapplication or negligence;
 - f. operation outside the product's environmental specifications;
 - g. improper site preparation or maintenance;
 - h. software;
 - i. other causes that do not relate to a product defect;
 - j. defects or damage suffered as a result of force majeure (including theft);
 - k. defects or damage suffered as a result of normal wear and tear, and/or
 - l. stolen goods.
3. If Matrox receives, during the applicable warranty period, notice of a defect in a warranted hardware product and the defective Matrox product in question, Matrox shall at its sole option, either repair or replace the product, and shall return the repaired product or a replacement product within a reasonable delay. The replacement product may not be new, provided that it has functionality at least equal to that of the product being replaced.
4. This warranty is valid in any country where Matrox hardware products are distributed by Matrox or its authorized dealers.
5. This Limited Warranty Statement gives the customer specific legal rights. The customer may also have other rights which vary from state to state in the United States, from province to province in Canada, and from country to country elsewhere in the world.

B. Limitations of Warranty

1. NEITHER MATROX NOR ANY OF ITS THIRD PARTY SUPPLIERS MAKES ANY OTHER WARRANTY OF ANY KIND, WHETHER EXPRESSED OR IMPLIED, WITH RESPECT TO MATROX PRODUCTS. MATROX SPECIFICALLY DISCLAIMS (and the customer, by accepting the Matrox product, specifically accepts such disclaimer and waives) ALL OTHER WARRANTIES, EITHER EXPRESSED OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR OR INTENDED PURPOSE OR USE AND THE WARRANTY AGAINST LATENT DEFECTS, WITH RESPECT TO THE HARDWARE AND/OR SOFTWARE. MATROX FURTHER DISCLAIMS ANY WARRANTY THAT MATROX PRODUCTS, IN WHOLE OR IN PART, WILL BE FREE FROM INFRINGEMENT OF ANY THIRD PARTY INTELLECTUAL PROPERTY OR PROPRIETARY RIGHTS.
2. To the extent that this Limited Warranty Statement is inconsistent with the law of the locality where the customer purchases the Matrox product, this Limited Warranty Statement shall be deemed modified to be consistent with such local law. Under such local law, certain limitations of this Limited Warranty Statement may not apply to the consumer.
3. To the extent allowed by local law, the remedies provided in this Limited Warranty Statement are the customer's sole and exclusive remedies.

C. Limitations of Liability

1. EXCEPT FOR THE OBLIGATIONS SPECIFICALLY SET FORTH IN THE LIMITED WARRANTY STATEMENT, IN NO EVENT SHALL MATROX BE LIABLE FOR:
 - a. any direct, indirect, special, incidental, consequential, foreseeable or unforeseeable, or punitive damages, whether based on contract, tort, delict or any other legal theory and whether advised of the possibility of such damages, and/or
 - b. damages arising from the loss of use, data, production revenue and/or profit of in connection with the Matrox product or any business interruption.
2. Without prejudice to the foregoing, any liability of Matrox for any breach of warranty shall be limited to the amount paid by the customer for the defective hardware in question.
3. To the extent allowed by local law, Matrox's entire liability and the customer's exclusive remedy shall be the repair or replacement of any defective product during the warranty period. Matrox does not offer any other warranty with respect to Matrox hardware or software or any other hardware or software.
4. Customer shall be responsible for all applicable taxes, duties and customs fees on any replacement unit, as well as all transport, insurance, storage and other charges incurred on all returned products.

D. Obtaining Service

1. Verify that your Matrox product was installed and configured according to the information in its accompanying documentation.
2. Read the "Troubleshooting" information included with the Matrox product to see if you can solve the problem yourself.
3. If you are still experiencing difficulties, please contact your dealer where you purchased your Matrox product.
4. If you must return a Matrox product, leave the configuration as it was when you were using it, and leave all identification stickers on the product. Pack the product in its original box and return to your Matrox dealer where the product was purchased, together with your proof of purchase. Your Matrox dealer will return the product for you. Alternatively, if this first option is unavailable to you, you may contact the Matrox Technical Support group who will issue an Return Merchandise Authorization (RMA) number, upon receipt of adequate proof of purchase, and inform you of shipping instructions. DO NOT RETURN THE PRODUCT TO MATROX WITHOUT MATROX'S RMA NUMBER AND EXPRESS AUTHORIZATION.

E. General

This limited warranty shall be governed by the laws of the Province of Quebec, Canada and the federal laws of Canada applicable therein and the courts of the Province of Quebec shall have exclusive jurisdiction to hear and decide any dispute instituted by the customer in connection with this limited warranty; the customer waives, by accepting the product, its rights to institute proceedings in connection with this warranty against Matrox in any jurisdiction other than Quebec.

Software license agreement

Single User Products This Matrox software (the “Software”) is copyrighted by Matrox Graphics Inc. All rights are reserved. The purchaser is granted a license to use the software only, subject to the following restrictions and limitations:

1. The license is for the original purchaser only, and is not transferable without written permission of Matrox.
2. The original purchaser may use the Software on a single computer owned or leased by the original purchaser. You may not use the Software on more than a single computer, even if you own or lease more than one computer, without written consent of Matrox.
3. The original purchaser may make back-up copies of the Software for his or her own use only, subject to the use limitations of this license.
4. The original purchaser may not engage in, nor permit third parties to engage in, any of the following:
 - Providing or disclosing the Software to third parties.
 - Providing use of the Software in a computer service business, network, time-sharing, multiple CPU or multi-user arrangement to users who are not individually licensed by Matrox.
 - Making alterations or copies of any kind in the Software (except as specifically permitted above).
 - Attempting to unassemble, de-compile or reverse engineer the Software in any way.
 - Granting sublicenses, leases, or other rights in the Software to others.
 - Making copies, or verbal or media translations, of the user’s guide.
 - Making telecommunication data transmissions of the Software.

Matrox reserves the right to terminate this license if there is a violation of its term or default by the Original Purchaser. Upon termination, for any reason, all copies of the Software must be immediately returned to Matrox, and the Original Purchaser shall be liable to Matrox for any and all damages suffered as a result of the violation or default.

Limited warranty Matrox warrants to you, for a period of 90 days normal use from your date of purchase, that:

1. The CD/disks on which the software is furnished and the documentation are not defective.
2. The Software is properly recorded upon the CD/disks included.
3. The documentation is substantially complete and contains all the information Matrox deems necessary to use the software.
4. The Software functions substantially as described in the documentation.

Matrox’s entire liability and your exclusive remedy shall be the replacement of any CD/Disks or documentation not meeting these warranties, which is returned to Matrox or an authorized dealer, together with a copy of your paid receipt. The above is the only warranty of any kind, either express or implied, including, but not limited to the implied warranties of merchantability and fitness for a particular use that is made by Matrox on this Licensed Software. In no event shall Matrox be liable to you or to any third party for consequential, special, indirect or incidental damages which you may incur as a result of using the licensed software, including, but not limited to, loss of data, or information of any kind which you may experience.

Index

B

- BIOS 24, 28
- Bracket
 - Replacing 10
 - Securing 10

C

- CD-ROM, Matrox 20, 21
- Connection setup 12–19
 - DisplayPort 15, 16, 18
- Connector
 - DisplayPort 15, 16, 18
 - DVI 14, 17
 - HD-15 14, 17
 - LFH-60 14
 - Mini DisplayPort 16
- Customer support 38–39

D

- Display
 - Primary 28
- Display driver
 - Manufacturer 20, 30
 - Matrox 20
 - Selecting 20

E

- Expansion slots 8

H

- Hardware 5
 - Acceleration 29, 31
 - Installation 7–11

I

- Installation
 - Hardware 7–11
 - Overview 6, 12

M

- Monitor
 - Settings 24–25
- Multi-display
 - Mode 29

P

- PCI Express 5, 8
- PowerDesk 5, 22
 - Accessing 22
 - Help 4, 22
 - Software 4
- Product information 35–37
 - Specifications 35

R

- Registration 39

S

- Software
 - Download 39
 - Installation 20–21

T

- Technical support 38
- Troubleshooting 23–34

U

- User Guide
 - About 4

V

- VESA 36
- VGA 36
- Video 32, 33, 34

W

- Warning 9, 16, 25, 27
- Warranty 40–41
- WDDM driver 20, 32
- Web, Matrox 38

X

- XDDM driver 21, 29, 32

USA

FCC Compliance Statement

Remark for the Matrox hardware products supported by this guide This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment causes harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures: • Reorient or relocate the receiving antenna • Increase the separation between the equipment and receiver • Connect the equipment into an outlet on a circuit different from that to which the receiver is connected • Consult the dealer or an experienced radio/TV technician for help.

WARNING Changes or modifications to this unit not expressly approved by the party responsible for the compliance could void the user's authority to operate this equipment. The use of shielded cables for connection of the monitor to the card is required to meet FCC requirements.

Declaration of conformity of a Class B digital device according to the FCC rules

We, the Responsible Party Matrox, 625 State Route 3, Unit B, Plattsburg, NY 12901 • Telephone: (514) 822-6000 (extension 2026) • Attention: Conformity Group Matrox

Declaration The Matrox hardware products supported by this guide comply with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) these devices may not cause harmful interference, and (2) these devices must accept any interference received, including interference that may cause undesired operation. Any question regarding this declaration should be forwarded to the above coordinates.

CANADA

(English) Industry Canada Compliance Statement

Remark for the Matrox hardware products supported by this guide These digital devices do not exceed the Class B limits for radio noise emission from digital devices set out in the Radio Interference Regulation of Industry Canada.

(Français) Conformité avec les exigences du ministère de l'Industrie Canada

Remarque sur les produits matériels Matrox couverts par ce guide Ces appareils numériques n'émettent aucun bruit radioélectrique dépassant les limites applicables aux appareils numériques de Classe B prescrites dans le Règlement sur le brouillage radioélectrique édicté par Industrie Canada.

JAPAN

VCCI Compliance Statement

Remark for the Matrox hardware products supported by this guide This is a Class B product based on the standard of the Voluntary Control Council for Interference from Information Technology Equipment (VCCI). If this is used near a radio or television receiver in a domestic environment, it may cause radio interference. Install and use the equipment according to the instruction manual.

この装置は、情報処理装置等電波障害自主規制協議会（VCCI）の基準に基づくクラスB情報技術装置です。この装置は、家庭環境で使用することを目的としていますが、この装置がラジオやテレビジョン受信機に近接して使用されると、受信障害を引き起こすことがあります。

取扱説明書に従って正しい取り扱いをして下さい。

(English) European user's information – Declaration of Conformity

Remark for the Matrox hardware products supported by this guide These devices comply with EC Directive 89/336/EEC for a Class B digital device. They have been tested and found to comply with EN55022/CISPR22 and EN55024/CISPR24. In a domestic environment these products may cause radio interference in which case the user may be required to take adequate measures. To meet EC requirements, shielded cables must be used to connect the monitor and other peripherals to the card. These products have been tested in a typical class B compliant host system. It is assumed that these products will also achieve compliance in any class B compliant system.

(Français) Informations aux utilisateurs Européens – Déclaration de conformité

Remarque sur les produits matériels Matrox couverts par ce guide Ces unités sont conformes à la directive communautaire 89/336/EEC pour les unités numériques de classe B. Les tests effectués ont prouvé qu'elles sont conformes aux normes EN55022/CISPR22 et EN55024/CISPR24. Le fonctionnement de ces produits dans un environnement résidentiel peut causer des interférences radio, dans ce cas l'utilisateur peut être amené à prendre les mesures appropriées. Pour respecter les impératifs communautaires, les câbles de connexion entre le moniteur ou autres périphériques et la carte doivent être blindés. Ces produits ont été testés dans un système hôte typique compatible classe B. On suppose qu'ils présenteront la même compatibilité dans tout système compatible classe B.

(Deutsch) Information für europäische Anwender – Konformitätserklärung

Anmerkung für die Matrox Hardware-Produktunterstützung durch dieses Handbuch Diese Geräte entsprechen EC Direktive 89/336/EEC für ein digitales Gerät Klasse B. Sie wurden getestet und entsprechen demnach EN55022/CISPR22 und EN55024/CISPR24. In einer Wohnumgebung können diese Produkte Funkinterferenzen erzeugen, und der Benutzer kann genötigt sein, entsprechende Maßnahmen zu ergreifen. Um EG-Anforderungen zu entsprechen, müssen zum Anschließen des Monitors und anderer Peripheriegeräte an die Karte abgeschirmte Kabel verwendet werden. Diese Produkt wurden in einem typischen, der Klasse B entsprechenden, Host-System getestet. Es wird davon ausgegangen, daß diese Produkte auch in jedem Klasse B entsprechenden System entsprechend funktionieren.

(Italiano) Informazioni per gli utenti europei – Dichiarazione di conformità

Nota per i prodotti hardware Matrox supportati da questa guida Questi dispositivi sono conformi alla direttiva CEE 89/336/EEC relativamente ai dispositivi digitali di Classe B. Sono stati provati e sono risultati conformi alle norme EN55022/CISPR22 e EN55024/CISPR24. In un ambiente domestico, questi prodotti possono causare radiointerferenze, nel qual caso all'utente potrebbe venire richiesto di prendere le misure adeguate. Per soddisfare i requisiti CEE, il monitor e le altre periferiche vanno collegati alla scheda grafica con cavi schermati. Questi prodotti sono stati provati in un tipico sistema host conforme alla classe B. Inoltre, si dà per scontato che questi prodotti acquisiranno la conformità in qualsiasi sistema conforme alla classe B.

(Español) Información para usuarios europeos – Declaración de conformidad

Observación referente a los productos de hardware de Matrox apoyados por este manual Estos dispositivos cumplen con la directiva de la CE 89/336/EEC para dispositivos digitales de Clase B. Dichos dispositivos han sido sometidos a prueba y se ha comprobado que cumplen con las normas EN55022/CISPR22 y EN55024/CISPR24. En entornos residenciales, estos productos pueden causar interferencias en las comunicaciones por radio; en tal caso el usuario deberá adoptar las medidas adecuadas. Para satisfacer las disposiciones de la CE, deberán utilizarse cables apantallados para conectar el monitor y demás periféricos a la tarjeta. Estos productos han sido sometidos a prueba en un típico sistema anfitrión que responde a los requisitos de la clase B. Se supone que estos productos cumplirán también con las normas en cualquier sistema que responda a los requisitos de la clase B.

(English) European user's information – Directive on Waste Electrical and Electronic Equipment (WEEE)

Please refer to the Matrox Web site (www.matrox.com/environment/en/weee) for recycling information.

(Français) Informations aux utilisateurs Européens – Règlementation des déchets d'équipements électriques et électroniques (DEEE)

Se référer au site Web de Matrox (www.matrox.com/environment/en/weee) pour l'information concernant le recyclage.

(Deutsch) Information für europäische Anwender – Europäische Regelungen zu Elektro- und Elektronikgeräten (WEEE)

Bitte wenden Sie sich an der Matrox-Website (www.matrox.com/environment/en/weee) für Recycling-Informationen.

(Italiano) Informazioni per gli utenti europei – Direttiva sui rifiuti di apparecchiature elettriche ed elettroniche (RAEE)

Si prega di riferirsi al sito Web Matrox (www.matrox.com/environment/en/weee) per le informazioni di riciclaggio.

FRANCE

Avertissement sur l'épilepsie

À lire avant toute utilisation d'un jeu vidéo par vous-même ou votre enfant Certaines personnes sont susceptibles de faire des crises d'épilepsie ou d'avoir des pertes de conscience à la vue de certains types de lumières clignotantes ou d'éléments fréquents dans notre environnement quotidien. Ces personnes s'exposent à des crises lorsqu'elles regardent certaines images télévisées ou qu'elles jouent à certains jeux vidéo. Ces phénomènes peuvent apparaître alors même que le sujet n'a pas d'antécédent médical ou n'a jamais été confronté à une crise d'épilepsie.

Si vous-même ou un membre de votre famille avez déjà présenté des symptômes liés à l'épilepsie (crise ou perte de conscience) en présence de stimulations lumineuses, veuillez consulter votre médecin avant toute utilisation.

Nous conseillons aux parents d'être attentifs à leurs enfants lorsqu'ils jouent avec des jeux vidéo. Si vous-même ou votre enfant présentez un des symptômes suivants: vertige, trouble de la vision, contraction des yeux ou des muscles, perte de conscience, trouble de l'orientation, mouvement involontaire ou convulsion, veuillez immédiatement cesser de jouer et consultez un médecin.

Précautions à prendre dans tous les cas pour l'utilisation d'un jeu vidéo Ne vous tenez pas trop près de l'écran.

- Jouez à bonne distance de l'écran de TV et aussi loin que le permet le cordon de raccordement.
- Utilisez de préférence les jeux de vidéo sur un écran de petite taille.
- Évitez de jouer si vous êtes fatigué ou si vous manquez de sommeil.
- Assurez-vous que vous jouez dans une pièce bien éclairée.
- En cours d'utilisation, faites des pauses de dix à quinze minutes toutes les heures.

**Trademarks • Marques déposées • Warenzeichen • Marchi registrati •
Marcas registradas**

Matrox Electronic Systems Ltd. /

Matrox Graphics Inc.	Matrox®, DualHead®, CenterWINDOW™, DVDMax™, GigaColor™, ASM™, ATC™, AuroraVX3mp™, AuroraVX™, DFC™, DLC™, DualHead2Go™, Epica™, Equinox™, Extio™, G400™, G450™, G550™, ICP™, Marvel™, MED2mp™, MED2mp-DVI™, MED3mp-DVI™, MED4mp™, MED5mp-DVI™, MED5mp™, Millennium™, MMS™, Multi-Monitor Series™, MultiDesk™, P650™, P650™ Low-profile, P690™, P750™, Parhelia™, Parhelia™ APVe, Parhelia-512™, Parhelia-LX™, Parhelia HR256™, PJ4OLP™, PowerDesk™, PowerSpace™, QID™, Quad Information Display™, RAD™, Quick Connect™, MaxVIEW™, MGA™, MGA-G100™, MGA-G200™, Onyx™, PixelTOUCH™, PrecisionCAD™, Precision SGT™, QuickDesk™, RAD2mp™, RAD3mp™, RAD9mp™, RAD PCI™, RAD PCIe™, RADQ2mp™, Rainbow Runner®, SonoVUE™, SPECTRUM™, TheatreVUE™, TripleHead™, TripleHead2Go™, VDA™, Veos™, Xenia™
Adobe Systems Inc.	Acrobat®, Reader®
Apple Computer, Inc.	Apple®, Mac®, Mac OS®
Belden Inc.	Belden®
Dolby Laboratories, Inc.	Dolby®, Dolby Digital®
Intel Corporation	Intel®, Pentium®
International Business Machines Corporation	IBM®, VGA®
Macrovision Corporation	Macrovision™
Microsoft Corporation	Aero™, Direct3D®, DirectDraw®, DirectShow™, DirectX™, Microsoft®, MS-DOS®, PowerPoint®, Windows®, Windows NT®, Windows Server®, Windows Vista™
Silicon Graphics, Inc.	OpenGL®
Silicon Image, Inc.	PanelLink™
U.S. Environmental Protection Agency	Energy Star™
Video Electronics Standards Association	DisplayPort™

• (English) Registered trademarks are registered in the United States, Canada, and/or other countries. All other nationally and internationally recognized trademarks and tradenames are hereby acknowledged. • (Français) Les marques déposées sont déposées aux États-Unis, au Canada et/ou dans d'autres pays. Toutes les autres marques et tous les autres noms déposés reconnus nationalement ou internationalement sont également reconnus par les présentes. • (Deutsch) Die eingetragenen Warenzeichen sind in den USA, Kanada und/oder anderen Ländern registriert. Alle sonstigen national und international bekannten Warenzeichen und Produktnamen werden hiermit anerkannt. • (Italiano) I marchi registrati sono registrati negli Stati Uniti, in Canada e/o in altri paesi. Tutti gli altri marchi registrati e nomi commerciali riconosciuti a livello nazionale e internazionale sono ugualmente riconosciuti qui. • (Español) Las marcas registradas están registradas en los EE.UU., Canadá u otros países. Por medio del presente se reconocen todas las demás marcas y nombres comerciales reconocidos a nivel nacional e internacional.

(English) Disclaimer

THE INFORMATION IN THIS GUIDE IS SUBJECT TO CHANGE AT ANY TIME AND WITHOUT NOTICE.

Matrox Graphics Inc. reserves the right to make changes in specifications at any time and without notice. The information provided by this document is believed to be accurate and reliable. However, no responsibility is assumed by Matrox Graphics Inc. for its use; nor for any infringements of patents or other rights of third parties resulting from its use. No license is granted under any patents or patent rights of Matrox Graphics Inc.

(Français) Responsabilité

LES INFORMATIONS CONTENUES DANS CE MANUEL PEUVENT ÊTRE MODIFIÉES À TOUT MOMENT SANS PRÉAVIS.

Matrox Graphics Inc. se réserve le droit de modifier les spécifications à tout moment sans préavis. Les informations contenues dans ce manuel sont reconnues comme étant précises et fiables. Cependant, Matrox Graphics Inc. n'assume aucune responsabilité concernant leur utilisation, ni leur contrefaçon ou les autres droits des tiers résultant de leur utilisation. Aucune licence n'est accordée sur aucun brevet ou droit d'exploiter un brevet de Matrox Graphics Inc.

(Deutsch) Haftungsablehnungserklärung

DIE IN DIESEM HANDBUCH ENTHALTENEN ANGABEN UND DATEN KÖNNEN OHNE VORHERIGE ANKÜNDIGUNG GEÄNDERT WERDEN.

Die Matrox Graphics Inc. behält sich das Recht vor, jederzeit und ohne Ankündigung technische Daten zu ändern. Es wird keine Garantie für die Richtigkeit des Inhalts dieses Handbuchs übernommen. Weiterhin übernimmt die Matrox Graphics Inc. keinerlei Verantwortung für die Benutzung dieses Handbuchs, weder für Verstöße gegen Patentrechte noch für andere Rechte Dritter, die aus seinem Gebrauch resultieren mögen. Es werden keinerlei Lizenzrechte gewährt für sämtliche Patente oder Patentrechte der Matrox Graphics Inc.

(Italiano) Discrezionalità

LE INFORMAZIONI CONTENUTE NEL PRESENTE DOCUMENTO SONO SOGGETTE A MODIFICHE SENZA PREAVVISO.

Matrox Graphics Inc. si riserva il diritto di apportare variazioni di qualunque tipo alle specifiche tecniche in qualunque momento e senza alcun preavviso. Le informazioni contenute in questa documentazione sono ritenute corrette e attendibili. In ogni caso, non è imputabile a Matrox Graphics Inc. nessuna responsabilità per il loro utilizzo, come nessuna violazione a brevetti o diritti di altri produttori derivante dal loro utilizzo.

(Español) Renuncia

LA INFORMACION QUE CONTIENE EL PRESENTE MANUAL ESTA SUJETA A CAMBIOS SIN PREVIO AVISO EN CUALQUIER MOMENTO.

Matrox Graphics Inc. se reserva el derecho de realizar modificaciones en cualquier momento y sin previo aviso. La información facilitada en este documento se considera que es exacta y fiable. Sin embargo, Matrox Graphics Inc. no asume ninguna responsabilidad por su uso; ni por cualquier infracción de patentes u otros derechos de terceras partes derivados de su uso. No se concede ninguna licencia bajo cualesquiera patentes o derechos de patentes de Matrox Graphics Inc.

Matrox Graphics Inc.

1055 Saint Regis Boulevard
Dorval, Quebec, Canada H9P 2T4

North America: 1-800-361-1408

International: (514) 822-6000

Email: graphics@matrox.com

Web site: www.matrox.com/graphics

Technical support:

www.matrox.com/graphics/support

To locate the sales office nearest you, visit

www.matrox.com/graphics/contact

matrox[®]
Graphics for Professionals