

65" (64.5" viewable) Professional-grade LED Large Format Display

Large Full HD Screen for Hospitality and Pro/AV Environments

CDE6500-L



The ViewSonic® CDE6500-L is a 65" (64.5" viewable) professional-grade LED large format display that provides high-impact messaging in hotels, restaurants, and other businesses. The built-in media player supports USB playback of photos and music, as well as direct content cloning with hospitality mode—this provides an easy and efficient way for loading content onto multiple displays. This display features Full HD resolution, SuperClear® wide-angle viewing technology, 350-nit brightness, 5000:1 native contrast ratio, and dual integrated 10W speakers to deliver crystal-clear multimedia content to targeted audiences. Versatile connectivity options include HDMI (x3), VGA, Composite, YPbPr, RS232, and SPDIF interface for easy installation and control of a variety of high-definition devices. It also supports RS232 with IR pass-through and HDMI CEC pass-through, providing easy management and control of multiple-display installations with connected HD set-top boxes, media players, and Blu-ray™ players.

Full HD 1080p for Superior Pixel Performance

Full HD 1920x1080 resolution delivers superior pixel-by-pixel performance for a more realistic viewing experience. At this resolution, greater image clarity and detail brings high-definition multimedia content to life.

Handy USB Multimedia Playback & Cloning

With the handy PC-less USB playback feature, photos and music can be immediately played and shared by plugging a USB drive into the display. In addition, the CDE6500-L includes USB cloning for easy duplication in multi-screen environments.



Hospitality Mode for Automated Multi-screen Control

The CDE6500-L is great for multi-screen setups in hotels, restaurants, sports bars, or retail outlets that require automated control and customizable presets. With a USB-programmable hospitality setting, each television will have the same customized channel default, audio level, front-panel lockout, and auto power-up settings.



65" (64.5" viewable) Professional-grade LED Large Format Display

CDE6500-L

RS232 with IR Pass-through for Multi-device Control

The CDE6500-L's RS232 control port features IR pass-through to provide automated control for hospitality and commercial display installations. IR pass-through offers local control for set-top boxes or other connected devices, directly with the display's remote controller.

SuperClear Technology Improves IPS Panels for Better Wide-angle Viewing

Our SuperClear technology enhances IPS image quality for a better wide-angle viewing experience. With 176/176-degree vertical and horizontal viewing angles, your audience will experience accurate, vivid colors and consistent brightness levels whether looking at the screen from above, below, the front, or the side.

Versatile Inputs and One-time Configuration Settings


With a versatile selection of inputs, including HDMI (x3), CVBS, YPbPr and VGA, the CDE6500-L commercial display enables you to easily connect and use a variety of digital equipment. Best of all, the one-time display installation and setup feature means your preferred source settings are never lost.

Applications

- Indoor commercial display environments
- Retail digital signage – small to mid-size business
- Hotels, restaurants, bars, and hospitality environments
- Schools and Universities


Specifications

PANEL	Type	65.0" color TFT LCD Module with LED Backlight
	Display Area	56.2" horizontal x 31.6" vertical; 64.5" diagonal
	Optimum Resolution	1920x1080
	Contrast Ratio	5000:1 (typ)
	Viewing Angles	176° horizontal, 176° vertical
	Response Time	6.5ms
	Light Source	Long life, 50,000 hrs. (typ)
	Brightness	350 cd/m ²
	Aspect Ratio	16:9
	Panel Surface	Anti-glare coating
INPUT	Video Input	HDMI, component, VGA, CVBS
	Video Output	VGA, CVBS
	Control Input	RS232, USB
AUDIO OUTPUT	Speakers	Internal 10-watt (x2)
INPUT SIGNAL	TV/Video Comp	480i, 480p, 720p, 1080i, 1080p
CONNECTOR	Analog	15-pin mini D-sub (VGA), RCA Audio In, headphone out
	Digital	HDMI (x3), DVI, YPbPr, CVBS, SPDIF, USB
	Power	Power cord
CONTROLS	Basic	Power, Mute, Input, Vol+, Vol-, Up, Down, Menu
	Picture	Picture Settings, Picture Mode, Screen Size, PC Settings, Color Temperature, Backlight, Advanced Picture Settings
	Sound	Sound settings, Analog Sound, Digital Sound, Digital Audio Output, Equalizer Setting
	Parental	Lock Parent Control, V-CHIP, Change Password, Keypad Lock, Source Lock, System Lock
	Setup	Closed Caption, Menu Language, Clock, OSD Transparency, OSD Timer
	Others	Blue Back, No Signal Power Off, No Operation Power Off, User Monitor, Audio Only, TV ID, All Reset (See user guide for complete OSD functionality)

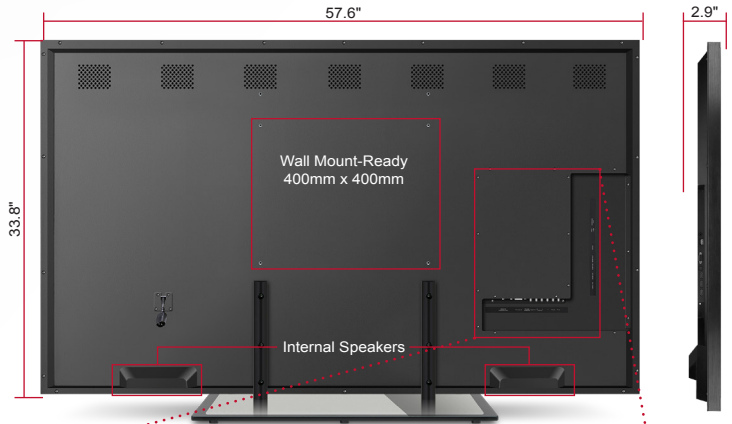

Optional Accessories (sold separately)

Wall Mount KitWMK-014



POWER	Voltage	AC 100-240V (universal), 50-60Hz
	Consumption	160W (typ)
OPERATING CONDITIONS	Temperature	32-104°F (0-40°C)
	Humidity	20-80% (non-condensing)
DIMENSIONS (W x H x D)	Physical (w/ Stand)	57.6 x 37.1 x 11.0 in. / 1462.8 x 942.4 x 280 mm
	Physical (w/o Stand)	57.6 x 33.8 x 2.9 in. / 1462.8 x 857.1 x 74.3 mm
	Packaging	60.7 x 39.4 x 8.9 in. / 1540 x 1000 x 225 mm
BEZEL DIMENSIONS	Left/Right	15mm / 15mm
	Top/Bottom	15mm / 34.5mm
WEIGHT	Net (w/ Stand)	92.3 lbs / 42.0 kg
	Net (w/o Stand)	82.0 lbs / 37.2 kg
	Gross	125.6 lbs / 57.0 kg
WALL MOUNT	VESA®	400 x 400 mm
REGULATIONS		FCC, CE, CB, UL (by request), RoHS, Mexico-UL CoC
RECYCLE/DISPOSAL		Please dispose of in accordance with local, state, or federal laws
WARRANTY		Three-year limited warranty on parts and labor



ViewSonic Corporation's QMS & EMS have been registered to ISO 9001 & ISO 14001, respectively, by TUV NORD.

What's in the box?

CDE6500-L display, power cable, VGA cable, remote control with batteries, Quick Start Guide, ViewSonic Wizard CD (User Guide)