



Hi-Speed USB Device Cable

A Male / Micro-B Male, Black

Connect with confidence.

MANHATTAN® Hi-Speed USB 2.0 Device Cables easily connect USB peripherals and accessories with desktop and notebook computers. Ideal for use with many USB external enclosures, hubs and other hot-swap, Plug and Play devices, MANHATTAN Hi-Speed USB 2.0 Device Cables support data transfer rates up to 480 Mbps on Windows and Mac systems for fast, reliable transmissions. Nickel-plated contacts, shielding and fully molded boots with strain relief help provide dependable connections, maximum conductivity and minimal data loss with reduced EMI interference.

Model	Length
325677	0.5 m (1.5 ft.)
307161	1.0 m (3 ft.)
393249	1.0 m (3 ft.)
393256	1.8 m (6 ft.)
325684	3.0 m (10 ft.)
325691	5.0 m (16.5 ft.)


Lifetime Warranty

Strict manufacturing standards ensure the highest quality in all MANHATTAN products. All items carry a full Lifetime Warranty — the strongest quality commitment anyone can make.

Model
307161
325677
325684
325691
393249
393256



REV.	DESCRIPTION	ENGR.	APPROVAL

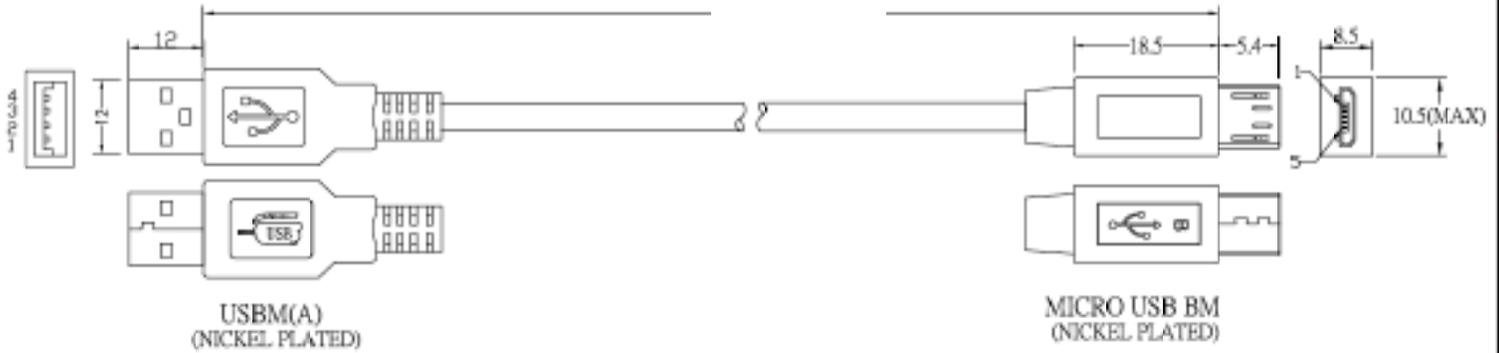

NOTE:

1. CABLE: UL2725 2.0VER.,AL+B,28AWG*1P+26AWG*2C
OD=3.8mm, BLACK COLOR,PVC JACKET(AM BRAID)
2. LENGTH:1000mm.
3. CONNECTORS:USBM(A)*1PCS,(NICKEL PLATED) MICRO USBM(B)*1PCS(NICKEL PLATED)
4. MOLD:BLACK MOLDING.
5. CONTACTS:

USBM(A)	1	2	3	4	64
MICRO USBBM	1	2	3	5	64
	RED	WHITE	GREEN	BLACK	SHIELD
		#28	#28		
		PAIR			

6. TEST METHOD:

OPEN/SHORT/MISWIRE
CONTACT RES:10Ω (MAX)
INSULATION:5MΩ.
HI-POT TEST:DC300V/10ms.

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF MANHATTAN AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF MANHATTAN.

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS ANGULAR TOLERANCE=1°

TOLERANCE (INCH)	TOLERANCE (MM)
∅	+0.02
∅	+0.01
∅	+0.008
∅	+0.007



TITLE:	APPR:		
	CHKD:	XIE	
CUSTOMER:	DRWR:	WJF	Date: 08/25/16
CUSTOMER P/N:	Unit:	mm	Projection: 1st
CT P/N:	Scale:	1:1	Size: A4
DWG NO.:	Sheet:	1 of 1	REV: A

Features

- USB 2.0 Standard-A male to USB 2.0 Micro-B male
- Connects a Hi-Speed USB device to a Hi-Speed USB hub or computer
- Supports speeds of up to 480 Mbps
- Hi-Speed USB for ultra-fast data transfer rates with zero data degradation
- Lifetime Warranty

Specifications

STANDARDS AND CERTIFICATIONS

- UL 2725
- USB 2.0

CONNECTORS

- (1) USB 2.0 Standard-A male
- (1) USB 2.0 Micro-B male
- Nickel plated
- Molded PVC boot

CABLE

- 28 AWG conductors
- Shielded
- Withstanding voltage: 300 V DC 10 ms
- Insulation resistance: 5 MOhms
- Contact resistance: 10 Ohms
- Thermal plastic casing

PACKAGE CONTENTS

- Hi-Speed USB Device Cable

For more information on MANHATTAN products, consult your local dealer or visit www.manhattan-products.com.



Copyright © MANHATTAN

