

24" (23.6" viewable) Full HD Ergonomic LED Monitor with Integrated Webcam



All-in-One Video Conferencing Solution
with SuperClear® MVA Technology

VG2437Smc



Available for this model:
**Privacy Filter
Screen Protector**
VSPF2360
(Sold Separately)

Enjoy face-to-face meetings right from your desktop! With Full HD resolution, an integrated 2MP webcam, and dual 2W speakers, the ViewSonic® VG2437Smc delivers an all-in-one video conferencing solution that transports you to any meeting room. With SuperClear® MVA technology, this 24" (23.6" viewable) monitor delivers stunning brightness and contrast at nearly any viewing angle—allowing you to see the true color and detail of any design, photograph, or document shared by your colleagues. Save on time and travel expenses, without sacrificing face-to-face communication, with the ViewSonic VG2437Smc.

Key Features:

Full HD LED monitor with integrated 2MP webcam, mic/headphone ports, and speakers for a complete video conferencing solution

Future-proof DisplayPort connectivity, DVI, and VGA inputs

SuperClear® MVA technology for stunning color performance and wide-angle viewing

Ergonomic tilt, swivel, pivot, and height-adjustable design for maximum comfort and productivity

Exclusive ViewMode technology delivers superior color rendering and intuitive settings

Designed for:

Business


Government

Education

24" (23.6" viewable) Full HD Ergonomic LED Monitor with Integrated Webcam



VG2437Smc

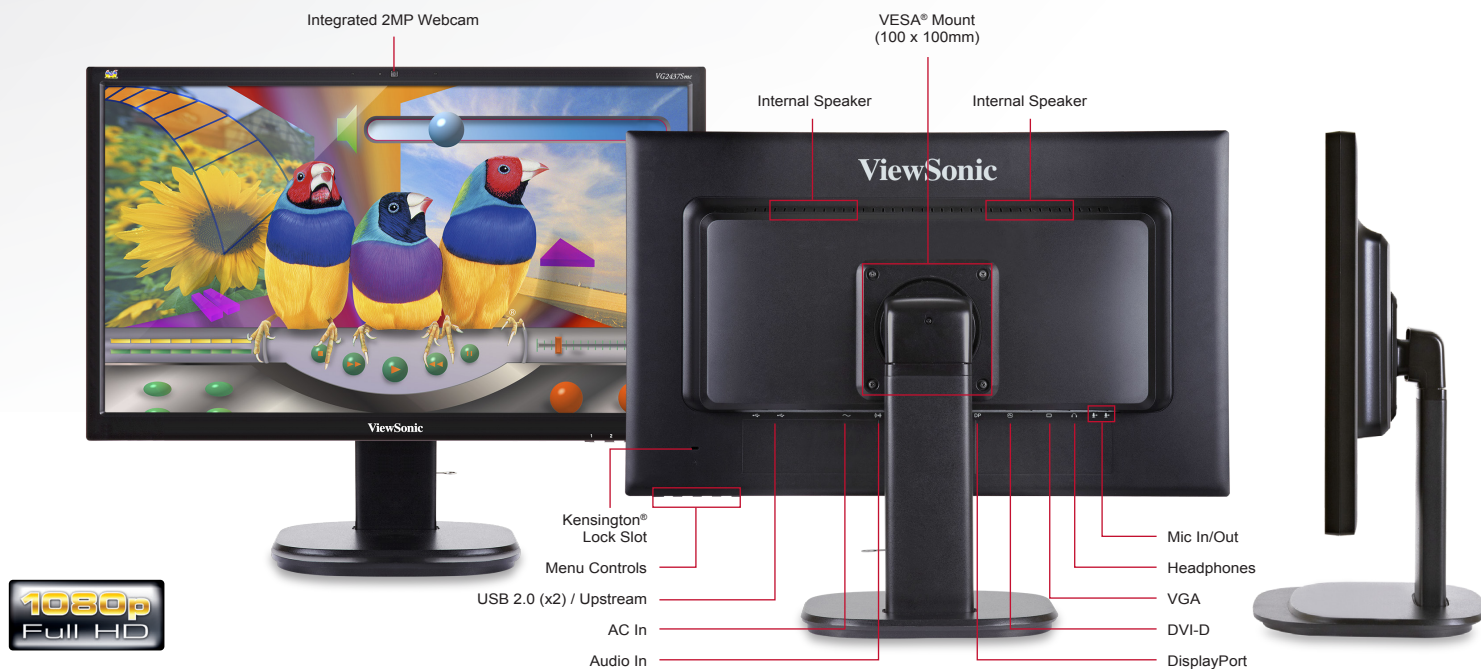

Specifications

LCD PANEL	Type	Color Active Matrix TFT LCD
	Display Area	20.5" horizontal x 11.5" vertical; 23.6" diagonal
	Optimum Resolution	1920x1080
	Brightness	250 cd/m ² (typ.)
	Contrast Ratio	3,000:1 (typ.)
	Dynamic Contrast Ratio	20,000,000:1
	Viewing Angles	178° horizontal, 178° vertical
	Colors	16.7M (6-bit + FRC)
	Response Time	6.9ms (GTG)
	Backlight	White-light LED
	Backlight Life	30,000 hours (min.)
	Panel Surface	Anti-glare, hard-coating (3H)
VIDEO INPUT	Digital	VGA, DVI, DisplayPort
	Frequency	Fh: 24~82kHz, Fv: 50~75Hz
	Sync	Separate Sync, Composite Sync, Sync on Green
AUDIO OUTPUT	Speakers	2-watt (x2)
COMPATIBILITY	PC	Up to 1920x1080 non-interlaced
	Mac [®]	Up to 1920x1080
CONNECTOR	Video In	VGA, DVI-D, DisplayPort
	Audio	3.5mm Audio In 3.5mm Headphones 3.5mm Mic In 3.5mm Mic Out
	USB Hub	USB 2.0 (x2), USB Upstream
	Power	External power adapter
WEBCAM	Hardware	2.0 MP
	OS Support	Windows [®] 8 / Windows [®] 7 / Windows [®] Vista
	Interface Support	USB 2.0
	Program Support	Skype / Windows Live Messenger

CONTROLS	Front Panel Buttons	Power, 1, Up, Down, 2
	OSD	Auto Image Adjust, Contrast/Brightness, Input Select, Audio Adjust, Color Adjust, Information, Manual Image Adjust, Setup Menu, Memory Recall (See user guide for complete OSD functionality)
ERGONOMICS	Tilt	Forward 3° / Back 25°
	Swivel	360°
	Height Adjust	5.3 In. (0-135 mm)
	Pivot	90°
POWER	Voltage	AC 100~240V (universal), 50 / 60Hz
	Consumption	24.5W (typ.) / 38.5W (max.)
	Optimize	21W (typ.)
	Conserve	15.5W (typ.)
OPERATING CONDITIONS	Temperature	32~104° F (0~40° C)
	Humidity	20~90% (non-condensing)
DIMENSIONS (W x H x D)	Physical with Stand	21.9 x 17.8 x 9.4 in. / 556.8 x 450.9 x 239.6 mm
	Physical without Stand	21.9 x 13.4 x 2.4 in. / 556.8 x 340.3 x 60.5 mm
	Packaging	24.8 x 7.6 x 20.8 in. / 631 x 192 x 527 mm
WEIGHT	Net with Stand	11.5 lb. / 5.2 kg
	Net without Stand	8.3 lb. / 3.7 kg
	Gross	15.5 lb. / 7.1 kg
WALL MOUNT	VESA	100 x 100mm
REGULATIONS		WEEE, RoHS, UL, cUL, FCC-B, EPEAT silver, ENERGY STAR
RECYCLE/DISPOSAL		Please dispose of in accordance with local, state, or federal laws
WARRANTY		Three-year limited warranty on parts, labor and backlight

Optional Accessories

ViewSonic DVI-D Digital cable 1.8m	CB-00008187
Mini DisplayPort cable, 1.8m	CB-00010958
DisplayPort cable Male to Male 9.2m 28AWG	CB-00010684
DisplayPort cable.....	CB-00010555
DisplayPort to DVI Adapter.....	LCD-CABLE-001

What's in the box?

VG2437Smc monitor, Power cable, VGA cable, DVI cable, USB cable, Audio cable, Mic cable, Quick Start Guide, ViewSonic Wizard CD (User Guide)



ViewSonic Corporation's QMS & EMS have been registered to ISO 9001 & ISO 14001, respectively, by TUV NORD.