



SuperSpeed USB Device Cable

A Male / Micro B Male, Blue

Quality connections for SuperSpeed performance.

MANHATTAN® SuperSpeed USB Cables are designed, engineered and constructed of quality materials to deliver the faster speeds required to support the next generation of the most prevalent computing interface. Backwards compatibility with Hi-Speed USB 2.0 provides a smooth transition between new and existing desktop and notebook computers, digital cameras, PDAs and other popular electronics and mobile computing accessories. MANHATTAN SuperSpeed USB Cables support data transfer rates up to 5 Gbps, nearly 10 times that of Hi-Speed USB 2.0 on Windows and Mac systems for ultra-fast, reliable transmissions. Full shielding, molded boots and protective, flexible PVC jackets help support SuperSpeed USB bi-directional communications, reduce EMI interference and provide maximum conductivity with minimal user wait times and data loss.

Model	Length
325417	1.0 m
325424	2.0 m
325431	3.0 m


Lifetime Warranty

Strict manufacturing standards ensure the highest quality in all MANHATTAN products. All items carry a full Lifetime Warranty — the strongest quality commitment anyone can make.

Model
325417
325424
325431



REV.	DESCRIPTION	ENG.	APPROVAL
------	-------------	------	----------

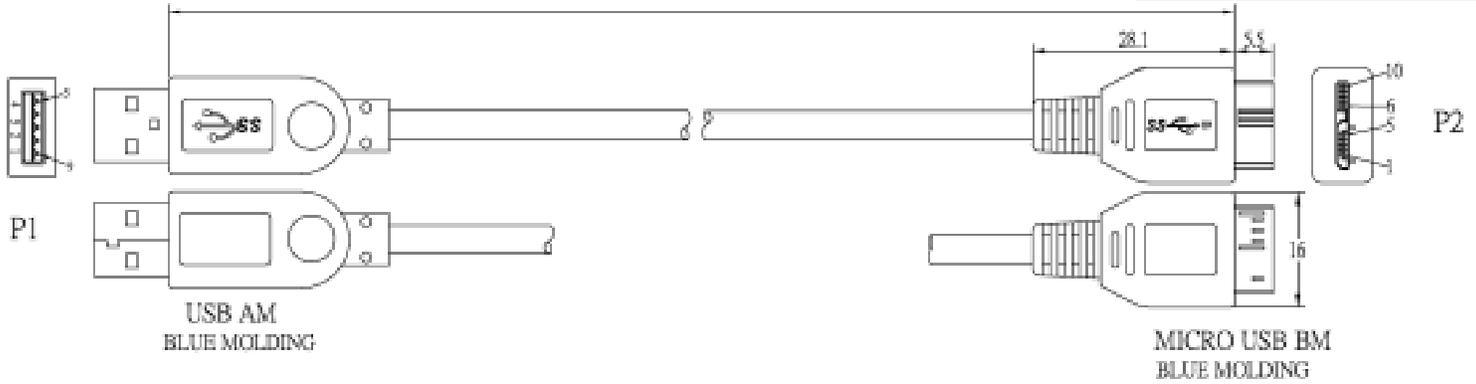

- NOTE:**
1. CABLE:UL2725 [(30#*1P+AM+D+HM)*2C+(28#*1P+AM)*1+24#*2C]+AL+B,OD=5.5mm,BLUE COLOR,PVC JACKET.(AM BRAID,3.0VER)
 2. LENGTH:1000mm
 3. CONNECTOR:USB AM*1PCS,MICRO USB BM*1PCS(BLUE INSULATOR 3.0VER)
 4. MOLD:BLUE MOLDING.
 - 5.CONTACTS:

P1	1	2	3	4	5	6	7	7	8	9	64
P2	1	2	3	5	6	7	8	8	9	10	64
	RED	WHITE	GREEN	BLACK	BLUE	YELLOW	GND	GND	PURPLE	ORANGE	BRAID
		TP			TP				TP		

5. OPEN/SHORT TEST: 100% TEST.
INSULATION: 5M.
6. RoHS Compliant

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF MANHATTAN AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF MANHATTAN.

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS ANGULAR TOLERANCE:±1°

TOLERANCES (MM)		TOLERANCES (INCH)	
Ø	±0.02	Ø	±0.0008
±	±0.01	±	±0.0004
±	±0.005	±	±0.0002
±	±0.002	±	±0.0001

MANHATTAN

TITLE:	APPD:			
	Check:	XIE		
CUSTOMER:	Drawn:	WJF	Date:	2010.01.14
CUSTOMER P/N:	Unit:	mm	Projection:	1st
NET P/N:	Scale:	1:1	Size:	A4
DRG. NO:	Sheet:	1 of 1	REV.:	A

Features

- USB 3.0 Standard-A male to USB 3.0 Micro-B male
- Connects a SuperSpeed USB device to a SuperSpeed USB hub or computer
- Supports speeds of up to 5 Gbps
- SuperSpeed USB for ultra-fast data transfer rates with zero data degradation
- Fully shielded to reduce EMI and other interference sources
- Lifetime Warranty

Specifications

STANDARDS AND CERTIFICATIONS

- UL 2725
- USB 3.0

CONNECTORS

- (1) USB 3.0 Standard-A male
- (1) USB 3.0 Micro-B male
- Nickel plated
- Molded PVC boot

CABLE

- 28 AWG conductors
- Shielded
- Withstanding voltage: 300 V DC 10 ms
- Insulation resistance: 5 MOhms
- Contact resistance: 10 Ohms
- Thermal plastic casing

PACKAGE CONTENTS

- SuperSpeed USB Device Cable

For more information on MANHATTAN products, consult your local dealer or visit www.manhattan-products.com.

MANHATTAN
BRINGING COMPUTERS TO LIFE

Copyright © MANHATTAN

