

Power up Your Small Network to Gigabit Speeds




- Delivers Gigabit speeds—up to 10x faster than Fast Ethernet
- Integrates 10/100/1000 Mbps devices on the same network
- Fits neatly into small workspaces—compact, metal case
- Runs silently without a fan
- Auto green mode detects cable length and adjusts power usage to save energy

Features

- Each port delivers up to 2000 Mbps of network speed (full duplex)
- Fast, auto-switching and auto-sensing 10/100/1000 Mbps Ethernet connection
- 16 switched ports provide bandwidth for PCs, servers or switches
- Auto Uplink™ automatically adjusts for straight-through or crossover cables
- Supports jumbo frames up to 16 KB
- Honors TOS/802.1p prioritization



- Up to 43% lower power consumption **
- Auto power-down mode saves energy when port is unused
- Auto green mode detects cable length and adjusts power usage to save energy
- Packaging manufactured with at least 80% recycled materials

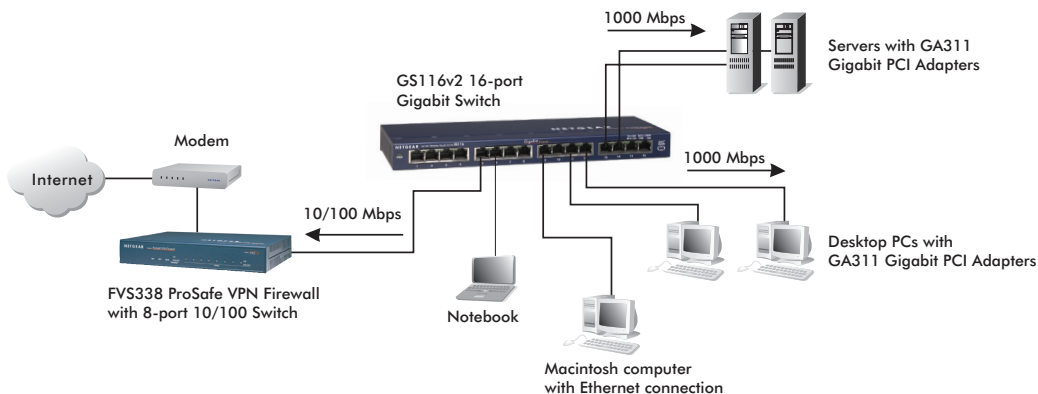

Technical Specifications**• Network Ports**

- 16 auto-sensing 10/100/1000 Mbps Ethernet ports

• Forwarding Mode

- Store-and-forward

• Performance

- Bandwidth: 32 Gbps (non-blocking)
- Forward rate (10 Mbps port): 14,800 packets/sec
- Forward rate (100 Mbps port): 148,000 packets/sec
- Forward rate (1000 Mbps port): 1,488,000 packets/sec
- Latency (100 to 100 Mbps): 40 μ (max)
- Latency (1000 to 1000 Mbps): 10 μ (max)
- Queue buffer memory: 512 Kbytes per port
- MAC address database: 8,000
- Acoustic noise: 0 dB
- Heat dissipation: 38.8 Btu/hr
- Mean time between failures (MTBF): 393,000 hours (~45 years)

• Power Consumption

- 12V DC, 1.5A, 18W; plug is localized to country of sale

• Status LEDs

- Power, link, speed and activity

• Physical Specifications

- Dimensions: (w x d x h)
285 x 103 x 27 mm
(11.22 x 4.06 x 1.06 in)
- Weight: 1.08 kg (2.38 lb)

• Environmental Specifications

- Operating temperature: 0° to 50° C (32° to 122° F)
- Operating humidity: 90% maximum relative humidity, non-condensing

• Safety Agency Approvals

- CE mark, commercial
- UL listed (UL 1950)
- C-Tick

• Electromagnetic Compliance

- CE Class A
- FCC Part 15 Class A
- EN 55022 (CISPR 22)
- EN 55024
- VCCI Class A
- C-Tick Class A

• Standards Compliance

- IEEE 802.3i 10BASE-T Ethernet
- IEEE 802.3u 100BASE-TX Fast Ethernet
- IEEE 802.3ab 1000BASE-T
- Honors 802.1p priority tags
- Honors DSCP priority tags
- Jumbo frame support: up to 16 KB

System Requirements

- Category 5e cables or better
- Network card for each PC or server (e.g. NETGEAR GA311)
- Network software (e.g., Microsoft® Windows®, Linux®, Mac® OS)

Warranty

- Switch: NETGEAR Lifetime Warranty†
- Power adapter: NETGEAR 2-year Warranty

ProSupport Service Packs Available**• OnCall 24x7**

- PMB0331-100 (US)
- PMB0331 (non-US)

• XPressHW

- PRR0331

Package Contents

- ProSafe 16-port Gigabit Desktop Switch (GS116v2)
- Wall-mount kit
- AC adapter
- Installation guide
- Warranty/support information card

NETGEAR Related Products**• Accessories**

- Gigabit Ethernet PCI Adapter (GA311)
- Gigabit PC Card Adapter (GA511)

• Switches

- ProSafe 5-port Gigabit Desktop Switch (GS105)
- ProSafe 8-port Gigabit Desktop Switch (GS108)

Ordering Information

- North America: GS116NA
- Europe - General: GS116GE
- Europe - UK: GS116UK
- Asia: GS116AU
- Japan: GS116JP

**NETGEAR®**

350 E. Plumeria Drive
San Jose, CA 95134-1911
1-888-NETGEAR (638-4327)
E-mail: info@NETGEAR.com
www.NETGEAR.com

© 2009 NETGEAR, Inc. NETGEAR, the NETGEAR Logo, NETGEAR Digital Entertainer Logo, Connect with Innovation, FrontView, IntelliFi, PowerShift, ProSafe, ProSecure, RAIDar, RAIDiator, X-RAID, RangeMax, ReadyNAS and Smart Wizard are trademarks of NETGEAR, Inc. in the United States and/or other countries. Mac and the Mac logo are trademarks of Apple Inc., registered in the U.S. and other countries. Other brand names mentioned herein are for identification purposes only and may be trademarks of their respective holder(s). Information is subject to change without notice. All rights reserved.

This product has been tested for quality assurance and this product or its components may have been recycled.

*Basic technical support provided for 90 days from date of purchase.

†Lifetime warranty for product purchased after 05/01/2007. For product purchased before 05/01/2007, warranty is 5 years for switch, 2 years for power supply.