

mydlink™, the Easiest Way to Keep an Eye on What Matters Most

Access live video feeds of your home or office from any internet-connected computer, iPhone, iPad, or Android device anytime and anywhere

Night Vision

View up to 5 meters in complete darkness

A Complete Monitoring System

Includes motion detection and email alerts, via the User Interface which makes this camera a truly comprehensive home monitoring system

Wired/Wireless Connectivity

Secure connection for flexible placement



DCS-932L

Day/Night Cloud Camera

Features

Multimedia

- Real-time MJPEG compression
- Motion detection

Security

- Send snapshots to your FTP site or via E-mail
- Remote video monitoring
- Record to your computer with included D-ViewCam™ software

Camera

- High quality VGA CMOS sensor for excellent image quality
- Built-in IR LED to capture video even in complete darkness

Ease Of Use

- UPnP & DDNS support
- WPS support

Networking

- mydlink™ enabled
- Wireless 802.11n connection

The DCS-932L, Day & Night Cloud Camera, is a versatile monitoring solution for your home or small office. Unlike a traditional webcam, the camera transmits high quality video images and audio for home and remote monitoring, even in complete darkness courtesy of the built-in Infrared LEDs. With mydlink™ included, this camera provides the simplest way to access and manage your camera, whether via your computer or app on your iPhone, Android or tablet.

24/7 Day And Night Monitoring

The DCS-932L is a standalone surveillance camera that can run without the need of a computer and requires no special hardware or software. When connected to the Internet, the DCS-932L can send e-mail notifications with snapshots whenever motion is detected. Night time monitoring is possible with the built-in infrared LEDs which allow for night time viewing of up to 5 metres, enabling round-the-clock monitoring, even in complete darkness.

mydlink™ Easy Setup

Connecting a camera on your network and accessing it has traditionally required complex configuration. mydlink™ makes it easy to access your camera from wherever you are, whenever it's convenient for you. Using the free mydlink™ Lite app for iOS and Android smartphones and tablets, you can connect and setup your mydlink™ camera without the need of a computer. A step-by-step guide has your camera up and running in a matter of minutes. Through the mydlink™ Lite app, you can set up a free mydlink™ account allowing you to view and manage your camera from any Internet connected computer. If you have more than one camera, you can add it to your existing mydlink™ account and watch all your cameras from a single location.

Accessing your cameras on the go is easy too. Just download the free mydlink™ app for your iPhone or Android and you can quickly and easily view your camera feed from anywhere with a wireless or 3G/4G LTE connection. Thanks to this app, you can monitor on-the-go even if you don't have access to a computer.


Wireless N Connectivity

The DCS-932L includes 802.11n wireless for fast and easy integration into your existing network environment. Wireless N allows you to stream high-quality video to remote sites and mobile devices. A site survey feature also allows you to view and connect to nearby wireless networks with ease. The DCS-932L also includes a standard Ethernet port for connections to traditional wired networks.


Full Featured Surveillance System

Included with the DCS-932L is the free D-ViewCam™ software. D-ViewCam™ IP camera surveillance software is a comprehensive surveillance system designed to centrally manage multiple IP cameras. Supporting up to 32 IP cameras, D-ViewCam™ is compatible with all current D-Link IP cameras and provides digital monitoring and recording of video, audio, and events for various security applications. This software provides users with a wide array of features for added convenience, including video recording and playback, Video mode, Map mode, Wizard mode, Expert mode, Event Action, and more.

mydlink™ Lite app



With the mydlink™ Lite app for iPhone, iPad and Android devices, you can quickly and easily setup and access your camera from anywhere with a Wi-Fi or 4G LTE/3G connection.

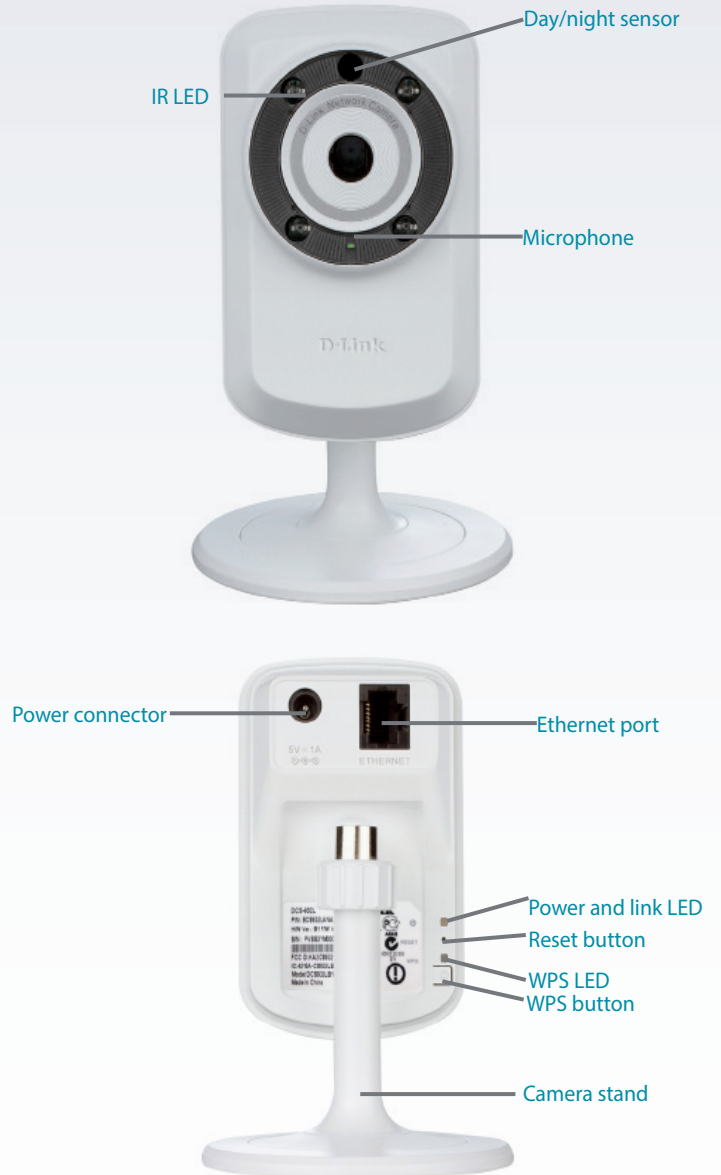

Technical Specifications

Camera

Camera Hardware Profile	<ul style="list-style-type: none"> • 1/5"VGA progressive CMOS sensor • 5 metre IR illumination distance, minimum illumination 0 lux with IR LED on • Built-in Infrared-Cut Removable (ICR) filter module • 4X digital zoom • Fixed length 5.01 mm • Aperture F2.8 	<ul style="list-style-type: none"> • Angle of view <ul style="list-style-type: none"> • (H) 45.3° • (V) 34.5° • (D) 54.9° • Exposure time: 1/15~1/15,000 sec. • Built-in microphone
Image Features	<ul style="list-style-type: none"> • Configurable image size, quality, frame rate, and bit rate • Time stamp and text overlays 	<ul style="list-style-type: none"> • Configurable motion detection windows • Configurable brightness, saturation, contrast
Video Compression	<ul style="list-style-type: none"> • MJPEG format compression 	<ul style="list-style-type: none"> • JPEG for still image
Video Resolution	<ul style="list-style-type: none"> • 640 x 480, 320 x 240, 160 x 112 at frame rates up to 30 fps 	
Audio Compression	<ul style="list-style-type: none"> • PCM 	
Connectivity	<ul style="list-style-type: none"> • 10/100 BASE-TX Ethernet port 	<ul style="list-style-type: none"> • 802.11n wireless

Network		
Network Protocols	<ul style="list-style-type: none"> • IPV4, ARP, TCP, UDP, ICMP • DHCP client • NTP client (D-Link) • DNS client • DDNS client (D-Link) • SMTP client 	<ul style="list-style-type: none"> • FTP client • HTTP server • PPPoE • UPnP port forwarding • LLTD
Security	<ul style="list-style-type: none"> • Password authentication 	<ul style="list-style-type: none"> • HTTP digest encryption
System Integration		
System Requirements for Web Interfaces	<ul style="list-style-type: none"> • Operating system: Microsoft Windows, XP, Vista, 7 • Browser: Internet Explorer, Firefox, Safari, Chrome 	
Event Management	<ul style="list-style-type: none"> • Motion detection 	<ul style="list-style-type: none"> • Event notification and uploading of snapshots via SMTP or FTP
Remote Management	<ul style="list-style-type: none"> • Configuration accessible via web browser 	
Mobile support	<ul style="list-style-type: none"> • mydlink™ Lite app for iOS and Android 	
D-ViewCam™ System Requirements	<ul style="list-style-type: none"> • Operating system: Microsoft Windows 7 / Vista / XP • Web Browser: Internet Explorer 7 or higher 	<ul style="list-style-type: none"> • Protocol: standard TCP/IP
D-ViewCam™ Software Functions	<ul style="list-style-type: none"> • Remote management/control of up to 32 cameras • Viewing of up to 32 cameras on one screen • Supports all management functions provided in web interface 	<ul style="list-style-type: none"> • Scheduled motion triggered, or manual recording options
General		
Dimensions, including base	<ul style="list-style-type: none"> • 65.8 x 126 x 65 mm (2.59 inches x 4.96 inches x 2.56 inches) 	
Weight	<ul style="list-style-type: none"> • 76.9 grams (0.21 lbs) 	
Power	<ul style="list-style-type: none"> • 5 V DC/1.2 A, 50/60 Hz 	
Power Consumption	<ul style="list-style-type: none"> • 2 W 	
Temperature	<ul style="list-style-type: none"> • Operating: 0 to 40 °C (32 to 104 °F) 	<ul style="list-style-type: none"> • Storage: -20 to 70° C (-4 to 158 °F)
Humidity	<ul style="list-style-type: none"> • Operating: 20% to 80% non-condensing 	<ul style="list-style-type: none"> • Storage: 20% to 80% non-condensing
Certifications	<ul style="list-style-type: none"> • CE, IC, FCC, C-Tick 	



For more information: www.dlink.com

D-Link European Headquarters. D-Link (Europe) Ltd., D-Link House, Abbey Road, Park Royal, London, NW10 7BX.
Specifications are subject to change without notice. D-Link is a registered trademark of D-Link Corporation and its overseas subsidiaries.
All other trademarks belong to their respective owners. ©2013 D-Link Corporation. All rights reserved. E&OE.

Updated January 2014