

TM-22



A 22" 10-point touch display with dual-hinge stand designed for multi-user interactive environments.

With the AG Neovo TM-22, industry professionals can keep an eye on budgets without losing sight of performance. Incorporating the advanced projected capacitive touch technology, the TM-22 not only comes with a stylish design but also offers smooth and accurate touch response. On top of LED backlighting and Full HD resolution, it comes with 10-point multi-touch capability that delivers seamless compatibility with Windows® 7 & 8 touch functions. The flexible dual-hinge stand ensures multi-user comfort and productivity. The TM-22 is the ideal multi-touch solution for a great diversity of interactive environments.

- > Incorporates Projected Capacitive Touch Technology
- > 10-point touch capabilities for systems with Microsoft® Windows® 7 and 8
- > LED-backlit technology with 1920 x 1080 Full HD resolution
- > Flush touch screen makes surface neat and clean
- > Connectivity: VGA, HDMI and DisplayPort
- > Built-in USB Port (USB 3.0) for easy connection with peripheral devices
- > HID compliant for easy integration without additional drivers
- > Built-in speakers
- > Flexible dual-hinge stand design to maximise viewing comfort for multiple users
- > Tilt capacity from - 5° to 90°
- > VESA standard wall mount
- > Kensington® Security socket

TM-22


Specifications

TM-22

| | | |
|-----------------------------|-----------------------------|---|
| Panel | Panel Type | LED-Backlit TFT LCD |
| | Panel Size | 21.5" |
| | Max. Resolution | FHD 1920 x 1080 |
| | Pixel Pitch | 0.248 x 0.248 |
| | Brightness | 250 cd/m ² (Typical) |
| | Contrast Ratio | 1,000 : 1 (Typical) |
| | Viewing Angle (H/V) | 170°/160° |
| | Display Colour | 16.7 M |
| | Response Time (GTG) | 3 ms (GTG) |
| Frequency (H/V) | H Freq. | 30kHz ~ 83kHz |
| | V Freq. | 55Hz ~ 75Hz |
| Input | VGA | 15-Pin D-Sub |
| | HDMI | HDMI |
| | DisplayPort | DisplayPort |
| USB Port | USB Port | USB 3.0 x 4 |
| Audio | Audio In | 1 x stereo audio in for PC (audio jack, 3.5 Ø) |
| | Speaker | 2 W x 2 |
| Touch Screen | Technology | Projected Capacitive |
| | Panel Interface | USB (Type-B, HID compliant) |
| Power | Power Supply | Internal |
| | Power Requirements | 100 ~ 240V, 50 - 60Hz |
| | Consumption | < 25W (On) |
| | | < 0.5W (Stand-by) < 0.5W (Off) |
| Operating Conditions | Temperature | 0°C ~ 40°C (32°F~104°F) |
| | Humidity | 10% ~ 85% (No condensation) |
| Mounting | VESA FPMPI | Yes (100mm x 100mm) |
| Dimensions | with Base (W x D x H) | 522.4mm x 238.5mm x 385mm (20.6" x 9.4" x 15.2") |
| | Packaging (W x H x D) | 586mm x 186mm x 422mm (23.1" x 7.3" x 16.6") |
| Weight | Product Weight (with base) | 6.6 kg (14.5 lbs) |
| | Packaging Weight | 8.5 kg (18.7 lbs) |
| Regulation Approval | Certifications & Compliance | FCC, CB, CE, RoHS, GOST-R, WEEE, REACH, BSMI |
| Accessories | Supplied | CD ROM (user manual), warranty card, power cord, 15-Pin D-Sub cable, USB cable, Audio cable |



Integration of 10-point touch and projected capacitive touch technology provides accurate and precise touch experience

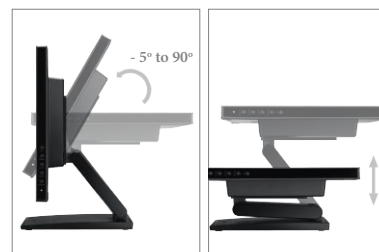

Flexible dual-hinge stand design to maximise viewing comfort for multiple users



Versatile connectivity: VGA, HDMI, DisplayPort and USB port allow for effortless system integration