

HDMI2VGA

HDMI to VGA Video Converter with Audio

StarTech.com
Making hard-to-find easy!®

CONVERGEAV

Installation Guide

Packaging Contents

- 1 x HDMI2VGA converter
- 1 x DE-15 VGA to Component RCA cable adapter
- 1 x Universal Power Adapter
- 1 x Installation Guide

System Requirements

- HDMI enabled video/audio source
- VGA or YPbPr component enabled display device
- Stereo audio speakers with 3.5mm mini-jack (optional)
- Available electrical outlet

Specifications

Video Signal	RGBHV, YPbPr
Audio Signal	PCM
Connectors	1 x HDMI 1 x DE-15 VGA female 1 x 3.5mm mini-jack 1 x DC power
LEDs	1 x Power
Maximum Video Resolution	1920x1200@60Hz 1080p@50/60Hz
Power Adapter	5VDC, 2.6A, center positive
Operating Temperature	0°C ~ 40°C (32°F ~ 104°F)
Storage Temperature	0°C ~ 60°C (32°F ~ 140°F)
Humidity	0 ~ 60% RH
Dimensions (WxHxD)	76.0mm x 30.0mm x 92.0mm
Weight	172g

Warranty Information


This product is backed by a one year warranty.

In addition, StarTech.com warrants its products against defects in materials and workmanship for the periods noted, following the initial date of purchase. During this period, the products may be returned for repair, or replacement with equivalent products at our discretion. The warranty covers parts and labor costs only. StarTech.com does not warrant its products from defects or damages arising from misuse, abuse, alteration, or normal wear and tear.


Limitation of Liability

In no event shall the liability of StarTech.com Ltd. and StarTech.com USA LLP (or their officers, directors, employees or agents) for any damages (whether direct or indirect, special, punitive, incidental, consequential, or otherwise), loss of profits, loss of business, or any pecuniary loss, arising out of or related to the use of the product exceed the actual price paid for the product. Some states do not allow the exclusion or limitation of incidental or consequential damages. If such laws apply, the limitations or exclusions contained in this statement may not apply to you.

Front Side View

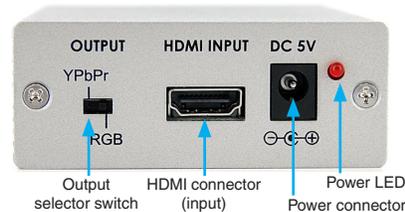

Rear Side View

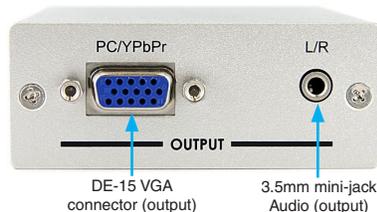

*photos may vary from actual product

Installation

1. Make sure all devices are powered off before installing the HDMI2VGA converter.
 2. Connect the HDMI video/audio source to the HDMI2VGA converter using a standard male/male HDMI cable.
 3. If connecting the HDMI2VGA to a VGA display device, use a standard male/male VGA cable. Set the "Output" selector switch to RGB mode.
 4. If connecting the HDMI2VGA to a component video (YPbPr) display device, use the included VGA to RCA component cable adapter. Set the "Output" selector switch to YPbPr mode.
- OPTIONAL:** If the HDMI source is also transmitting audio, stereo speakers/headphones may be connected to the 3.5mm mini-jack connector.
5. Connect the power adapter from a power outlet to the HDMI2VGA converter. The LED next to the power connector should light up solid.
 6. Power on the display device.
 7. Power on the HDMI video/audio source.
 8. The HDMI2VGA converter will automatically convert the incoming video signal to the configured output signal. The video resolution, refresh/scan rate, etc. will remain the same as the original.