

PowerWalker VI 2000 LCD/UK

Line-Interactive UPS

2000VA Line-Interactive UPS

5x UK outlets


USB Connection for monitoring

LCD display to show all UPS settings

Built-in boost and buck AVR function



Item-No. 10120033

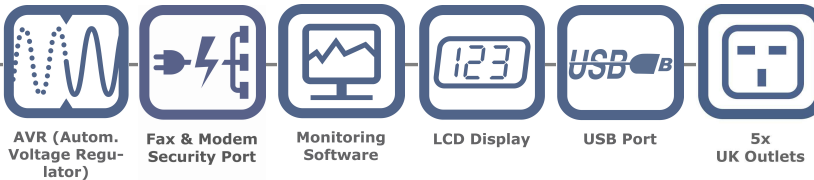

Product Features

PowerWalker VI 2000 LCD/UK offers longer backup time for business workstation. It provides comprehensive LCD display for users to monitor the power status. With powerful protection, it secures your data loss from power failure, surge, and sags.

- Built-in super smart charger, shorten 50% of charging time
- Excellent microprocessor control guarantees high reliability
- Boost and Buck AVR for voltage stabilization
- Off-mode auto charging
- No load auto shutdown
- Auto-restart while AC is recovering
- Simulated sine wave
- Cold start function
- Built-in USB communication port and RJ-45 phone protection



Technical Details

Product Features

Capacity	2000VA / 1200W
-----------------	----------------

Input

Voltage	220/230/240VAC
----------------	----------------

Voltage Range	160-290VAC
----------------------	------------

Output

Voltage	220/230/240VAC
----------------	----------------

Voltage Regulation	± 10 % (Battery Mode)
---------------------------	-----------------------

Frequency	50 or 60Hz
------------------	------------

Freq. Regulation	±1 Hz (Battery Mode)
-------------------------	----------------------

Waveform	Simulated Sine wave
-----------------	---------------------

Transfer Time

Typical	2-6ms
----------------	-------

Battery

Type	12V / 9Ah
-------------	-----------

Quantity	2x
-----------------	----

Recharge Time	4h to 90%
----------------------	-----------

Full Protection

Discharge	Yes
------------------	-----

Overcharge	Yes
-------------------	-----

Overload	Yes
-----------------	-----

LCD Display

LCD Indicators	AC mode, Battery mode, Load level, Battery capacity, Input voltage, Output voltage, Overload alarm, Fault alarm and Low battery alarm
-----------------------	---

Audio Indicators

Battery Mode	Beep every 10sec
---------------------	------------------

Low Battery	Beep every second
--------------------	-------------------

Fault	Beep every 0.5sec
--------------	-------------------

Battery Weak	Beep every 2sec
---------------------	-----------------

Battery faulty	Continuously sounding
-----------------------	-----------------------

Connections

Communication	USB
----------------------	-----

Outlets	4x Schuko
----------------	-----------

Protection Port	RJ45 in/out
------------------------	-------------

Software & System Requirements

Software	ViewPower
-----------------	-----------

Operating System	For details visit: www.powerwalker.com/viewpower.html
-------------------------	--

Other	1x USB port
--------------	-------------

Product Details

Dimensions	397mm x 146mm x 205mm (DxWxH)
-------------------	----------------------------------

Colour	Black
---------------	-------

Weight UPS case	12.1kg
------------------------	--------

Fan Control	Auto (On if battery is charged/ discharged)
--------------------	--

Noise Level	< 40dB
--------------------	--------

Model Code	VI 2000 LCD/UK
-------------------	----------------

Environment

Temperature	0°C – 40°C
--------------------	------------

Humidity	0 - 90% (non-condensing)
-----------------	--------------------------

Package Content

Package Content	PowerWalker VI 2000 LCD/UK, Software CD, USB cable, AC input power cord, printed manual
------------------------	---

Logistic Data

Giftbox Language	EN/DE/FR/ES/IT/PT/SV/FI/NO/TR RU/UA/BY/PL/CZ/HR/HU/BG/KK/SR
-------------------------	--

Manual Language	EN
------------------------	----

Dimension/Giftbox	495mm x 235mm x 285mm (DxWxH)
--------------------------	----------------------------------

Weight/Giftbox	13.2kg
-----------------------	--------

Pieces/carton	1
----------------------	---

Pieces/palette	42
-----------------------	----

BlueWalker Item-No.	10120033
----------------------------	----------

EAN	4260074974379
------------	---------------

Warranty	24 Months (except battery)
-----------------	----------------------------

Use UPS configurator on www.powerwalker.com for detailed backup time information.

Version: EN 27/05/2011

We reserve the right for technical changes and mistakes

PowerWalker is a brand of:

BlueWalker GmbH

Martin-Buber-Strasse 12 • D-41470 Neuss • Germany

Phone: +49 (0) 2137 / 92 98 73 • Fax: +49 (0) 2137 / 78 73 925

info@bluewalker.eu • www.bluewalker.eu • www.powerwalker.com