

MDP2HDMIUSBA

Mini DisplayPort to HDMI Adapter with USB Audio

Installation Guide

Packaging Contents

- 1 x MDP2HDMIUSBA adapter

System Requirements


- DisplayPort enabled computer system with available mini DisplayPort port
- USB enabled computer system with available port
- HDMI enabled display device

Specifications

Bus Interface	Mini DisplayPort 1.1a USB 2.0
Video Signal	HDMI 1.3b
Connectors	1 x Mini DisplayPort male 1 x HDMI female 1 x USB type A male
LEDs	1 x Power
Integrated Cable Length	60cm / 2ft
Maximum Video Resolution	1920x1200 / 1080p
Audio Support	Yes - 2 channel LPCM
HDCP Support	Yes
Operating Temperature	5°C ~ 35°C (41°F ~ 35°F)
Storage Temperature	0°C ~ 70°C (32°F ~ 158°F)
Humidity	0 ~ 80% RH

Installation

1. Make sure the computer system and display device are turned off.
2. Connect the mini DisplayPort connector into the host computer system's video card.
3. Connect the USB connector on the adapter into an available USB port on the host computer system.
4. Connect a standard male/male HDMI cable (not included) from the adapter to an available HDMI connector on the display device.
5. Power on the display device.
6. Power on the computer system. The Power LED on the adapter should light up.
7. The computer system should automatically detect the display device. Driver installation or special setup requirements depend on the connected display device. Consult any documentation included with your display device.
8. The operating system should also automatically detect and install a new audio output device.
9. If you wish to send audio over HDMI, check the audio properties for the operating system, to make sure the USB adapter is set as the default audio device.
NOTE: This will disable audio output from any speakers/headphones currently connected to the computer system.
10. If you do not wish to use audio over HDMI, set the default audio device back to the original audio output device (e.g. sound card) for your system.

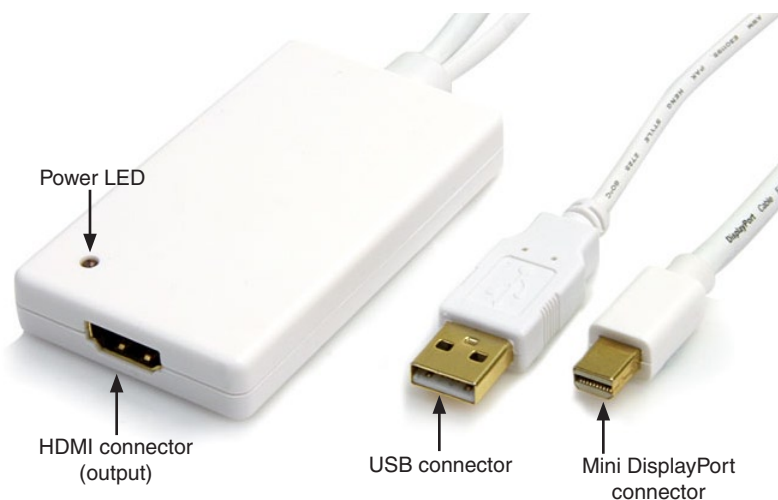

Warranty Information

This product is backed by a one year warranty.

In addition, StarTech.com warrants its products against defects in materials and workmanship for the periods noted, following the initial date of purchase. During this period, the products may be returned for repair, or replacement with equivalent products at our discretion. The warranty covers parts and labor costs only. StarTech.com does not warrant its products from defects or damages arising from misuse, abuse, alteration, or normal wear and tear.

Limitation of Liability

In no event shall the liability of StarTech.com Ltd. and StarTech.com USA LLP (or their officers, directors, employees or agents) for any damages (whether direct or indirect, special, punitive, incidental, consequential, or otherwise), loss of profits, loss of business, or any pecuniary loss, arising out of or related to the use of the product exceed the actual price paid for the product. Some states do not allow the exclusion or limitation of incidental or consequential damages. If such laws apply, the limitations or exclusions contained in this statement may not apply to you.